

www.icecompanies.com www.icerental.com



Operator & Parts Manual

Rider Auto Scrubber



RS26L+ RS32L+



8320020 REV.04 (05-2020)



READ OPERATOR MANUAL CAREFULLY!

IMPORTANT: To ensure full warranty protection, please fill out & return your warranty card.

Please fill out at time of installation for future i	reference.
Model No.	
Serial No.	
Machine Options	
Sales Rep.	
Sales Rep. Phone No.	
Customer ID Number	
Installation Date	

HOW TO ORDER PARTS

Only use ICE Company supplied or equivalent parts. Parts and supplies may be ordered online, by phone, by fax or by mail.

- 1. Identify the machine model.
- 2. Identify the machine serial number from the data label.
- 3. Ensure the proper serial number is used from the parts list.
- Identify the part number and quantity.
 Do not order by page or reference numbers.
- 5. Provide your name, company name, customer ID number, billing and shipping address, phone number and purchase order number.



PROTECT THE ENVIRONMENT

Please dispose of packaging materials, old machine components such as batteries, hazardous fluids, including antifreeze and oil, in an environmentally safe way according to local waste disposal regulations.



Always remember to recycle.

ICE Company Limited

XiangShi Road LiaoBu DongGuan GuangDong China

Tel: 0769 - 81869000 Fax:0769 - 81863000

Specifications and parts are subject to change without notice.

2

TABLE OF CONTENTS

SAFETY PRECAUTIONS	4
MACHINE COMPONENTS	5-6
MACHINE SETUP & INSTALLATION	7
MACHINE OPERATION	8
WHILE OPERATING MACHINE	9
TANK DRAINING	10
BATTERY CHARGING	10
PREVENTATIVE MAINTENANCE	11
FAULT CODE AND ELIMINATE	12
TECHNICAL SPECIFICATIONS	13
PARTS LIST	14-41
WEAR AND TEAR PARTS	42
WIRING DIAGRAM	43

SAFETY PRECAUTIONS

This machine is intended for commercial use. It is designed exclusively to scrub hard floors in an indoor environment and is not constructed for any other use. Only use recommended accessories.

WARNING: Explosion or fire can result from hydrogen gas. Keep sparks and open flames away! Keep battery compartment open when charging.

All operators shall read, understand and exercise the following safety precautions:

1. Do not operate machine:

- Unless trained and authorized.
- Unless you have read and understand the operators manual.
- In flammable or exploxive areas.
- With brake disabled.
- If not in proper operating condition.

2. Before starting machine:

- Make sure all safety devices are in place and operate properly.
- Check brakes and steering for proper operation.

3. When using machine:

- Go slow on inclines and slippery surfaces.
- Follow all safety guidelines.
- Be very careful when using the machine in reverse.
- Reduce speed when turning.
- Report and fix any damage to machine prior to operating it.
- Never allow children to play on or around.

4. Before leaving or servicing machine:

- Stop on level surface.
- Turn off machine.

5. When servicing machine:

- Read operators manual thoroughly prior to operating or servicing this machine.
- Use manufacturer supplied or approved replacement parts.
- Secure machine with wheel blocks prior to jacking the machine up.
- Use approved jack or hoist to safely elevate the machine.
- Disconnect batteries prior to working on machine.
- Avoid moving parts. Do not wear loose fitting clothing while servicing machine.

WARNING: Flammable materials can cause an explosion or fire. Do not use flammable materials in tanks.


WARNING: Flammable materials or reactive metals can cause explosion or fire. Do not pick up.

MACHINE COMPONENTS



- 1. Solution tank
- 2. Auto-fill hose port (Option)
- 3. Hose fill port & Cap
- 4. Squeegee assembly
- 5. Wheels, 10 inch
- 6. Scrub head assembly
- 7. Side squeegee assembly
- 8. Cup holder
- 9. Brake pedal
- 10. Propel pedal
- 11. Front drive wheel

- 12. Operator seat
- 13. Steering wheel
- 14. Control panel, Touch screen
- 15. i-synergy[™], ID card scanning area
- 16. LED light, work
- 17. Emergency Stop button
- 18. Adjusting handle, seat
- 19. Off-board battery charger port (Option)
- 20. Watching window, On board battery charger
- 21. Warning light
- 22. Recovery tank cover
- 23. Recovery tank
- 24. USB Charging port
- 25. Cabin door, Detergent bottle compartment
- 26. Mesh, Battery charger power cord.

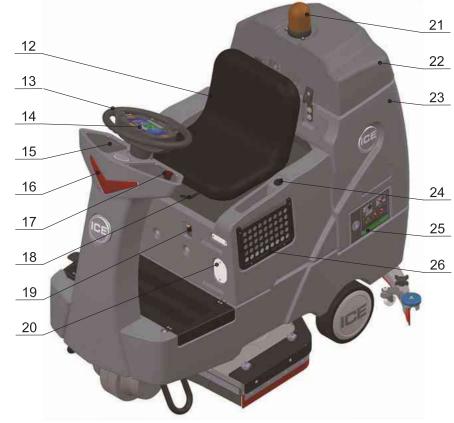

5

MACHINE COMPONENTS





- 27. Horn button
- 28. Battery meter
- 29. Date & Time
- 30. Solution flow adjusting button
- 31. 1-Step starting button
- 32. Work mode select button
- 33. Detergent adjusting button
- 34. Timer
- 35. Brush pressure adjusting button
- 36. Direction button
- 41 37. Setting button
 - 38. Vacuum motor button
 - 39. Fault icon
 - 40. Warning light button
 - 41. Drain hose, recovery tank
- 43 42. Vacuum hose
 - 43. Drain hose, solution tank
 - 44. Adjusting knob, Squeegee

i-synergy[™] INTRODUCTION

i-synergy[™] collects operational data from cleaning machines and transmit the information to ICE's server. The ICE server generates daily reports and send them to designated end users by email. From these reports, end users will have information about machines' usage and even specific timings.

Besides, i-synergy[™] also collects data on lithium-ion battery, vacuum motor, brush deck motor, transaxle, and other electrical components at least once every minute when the machine is in use and even during battery charging.

i-synergy[™] will send notifications instantly to the ICE server in case of any malfunction. ICE maintenance personnel will receive a SMS within minutes from the ICE server for immediate servicing.

MACHINE SET UP & INSTALLATION

UNCRATING MACHINE

Be sure and check packing carton for any damage. Immediately report any damage to carrier. Check the contents of package to ensure that the following items are included:

Machine

7

- · Lithium-ion Batteries
- · Squeegee assembly
- 2-Pad drivers
- 1. Uncrate the wooden box, place the top board on the edge of pallet, lie in the front of the machine, as below shown.



WARNING: Do not operate machine unless you have read & understood this manual.

- 2. Install batteries.(see INSTALLING BATTERIES)
- 3. Place the ID card on the scanning area (Machine components, #15) to turn on the machine, make sure the Squeegee assembly (Machine components, #4) and the Scrub head assembly (Machine components, #6) is off the floor.

4. Sit in the Operator seat (Machine components, #12), hold the Steering wheel (Machine components, #13), press the Propel pedal (Machine components, #10) and driving slowly the machine down from the slope.

INSTALLING BATTERIES

The machine uses the Lithium-ion batteries, the batteries are already in the machine upon delivery; However you will need to connect the Lithium ion batteries to the machine.

WARNING: Fire or Explosion Hazard. Keep sparks and open flames away! Keep battery compartment open when charging.

- 1. Turn off the machine.
- Open and prop up the Operator seat, plug the batteries connector to the machine adaptor, connect machine i-synergy[™] COM port to the batteries.

MACHINE SET UP

INSTALLING BRUSHES OR PADS

- 1. Turn off the 1-Step staring button (Machine components, #31) and raise the Scrub head assembly off the floor, then stop machine on the level surface, ensure the machine is turned off.
- 2. If using the pad driver, first attach the appropriate pad to the pad driver surface.
- 3. Align the pad driver or brush under the motor hub and push it upward to engage.



4. To remove the pad driver or brush, raise the scrub head and remove the Side squeegee assembly (Machine components, #7), push the edge of brush downward.

MOUNTING THE SQUEEGEE ASSEMBLY

- 1. Turn off the 1-Step switch and raise the Squeegee assembly off the floor.
- Mount the squeegee assembly to the squeegee pivot bracket. make sure the knobs are completely seated into the slots before securing knobs.
- Connect the Vacuum hose (Machine components, #42) to the squeegee assembly. Loop the hose by using the hose clip provided.
- 4. Check the squeegee blades for proper adjustment by adjusting the Squeegee adjusting knob (Machine components, #44).

FILLING THE SOLUTION TANK

The machine is equipped with a Hose fill port (Machine components, #3)at the side of the machine, and a bucket fill-port located under the recovery tank.

NOTE: Before accessing the bucket fill-port make sure that the recovery tank is empty. When filling the solution tank with a bucket, make sure that the bucket is clean. Do not use the same bucket for filling and draining the machine.

AUTO-FILL HOSE PORT(OPTION)

The machine have a optional Auto-fill hose port (Machine components, #2), you can fill the Solution tank by using filling hose equipped with Quick connectors.

- Connect the Quick connector of the filling hose to the Auto-fill port and connect the another end to the water supply connector.
- 2. Turn the water supply on, the water flow will automatically shut off when solution tank is full, and then turn the water supply off.
- Disconnect the Quick connector from the water supply end first, and then disconnect the Filling hose from machineand store in proper location.

WARNING: Do not put any flammable materials into solution tank. this can cause an explosion or a fire.

FILLING THE DETERGENT BOTTLE

The machine is equipped with a 4 liters Detergent bottle under the Recovery tank. You can fill the Detergent bottle by openning the Deterent bottle cabin door (Machine components, #25), and removing the detergent bottle cap.

The ratio of water and detergent is 0~5%, you can adjust this ratio via pressing the Detergent adjusting button (Machine components, #33). NOTE: Only use recommended cleaning chemicals. Contact your janitorial supply distributor for recommendations on properchemicals.

MACHINE OPERATION

WARNING: Do not operate machine unless you have read and understand this manual.

PRE-OPERATION CHECKS

- 1. Check the tank cover seals for damage.
- 2. Drain the recovery tank, check the vacuum fan inlet filter, clean them if necessary.
- 3. Check the vacuum hose for debris or blockage.
- 4. Check the squeegees for damage, wear and for deflection adjustment.
- 5. Check whether Pad/Brush is installed properly.
- 6. Check the brakes and steering for proper operation.

OPERATION THE MACHINE

- Sit on the Operator seat, adjusting the seat to comfortable place by pushing the Seat adjustment handle (Machine components, #18).
 NOTE: The machine will not travel unless the operator is sitting in the operator seat.
- Turn on the machine.
 Check the Touch screen (machine components, #14), if the machine have fault there will have a Fault icon display and blinking (Machine components, #39), please Do Not operation the machine unless the faults have been eliminated (please see FAULT CODES AND ELIMINATE section).
- Select the proper working mode by pressing the Work mode select button (Machine components, #32). The machine have 3 Modes of ECO, HEAVY Duty and User custom.

NOTE: To energy saving, recommend to using the ECO mode as possible.

For the User custom mode, you can select the preferred settings by pressing the Solution flow adjusting button (Machine components, #30), Detergent adjusting button (Machine components, #33), and the Brush pressure adjusting button (Machine components, #35).

- 4. Turn on the 1-Step starting button, the Scrub head assembly and the Squeegee assembly will lower down automatically, all the presetting functions will turn on.
- 5. The machine can scrub in both forward and backward, press the Directional button (Machine components, #36) to select the direction. The horn will sound and the squeegee will raise automatically (the vacuum motor will turn off after a short delay) when drive machine backwards. This is to prevents damaging the squeegee.

NOTE: Go slow when drive machine backwards.

6. Press the Propel pedal, the machine start scrubbing, the speed can be adjusted by controlling the force of foot stepping, light is slow, heavy is fast.

NOTE: Go slow on inclines and slippery surfaces.

- 7. To stop scrubbing, turn off the 1-Step starting button, the scrub head will raise automatically, the squeegee will also raise after a short delay, please keep moving until the dirty water is picked up, and then release the propel pedal and stop scrubbing.
- 8. Turn off the machine.

BRAKE DEVICE

The machine is drived by the Front drive wheel (Machine components, #11), that is equipped with a brake device. When you release the Propel pedal, the machine will stop travel, the park brake will engage after a short delay.

The machine is equipped with a Brake pedal (Machine components, #9), that can be used to control the machine if quicker stopping is needed or if operating on an incline.

EMERGENCY STOP BUTTON

The machine is equipped with an Emergency stop button (Machine components, #17), please push it if any emergency, that will shut off all power of machine and brake immediately.

To restart the machine, please reset the Emergency stop button, and turn off the machine and then restart.

NOTE: Please hold the steering wheel when emergency stop.

WHILE OPERATING MACHINE

WARNING: Fire Or Explosion Hazard. Do Not Pick Up Flammable Materials Or Reactive Metals.

- 1. Go slow on inclines and slippery surfaces, go slow when turn and reverse. Do not operate the machine on inclines that exceed 7% (4°).
- 2. Drive machine in a straight path as possible, avoid turning the Steering wheel too sharply when machine is in motion. avoid sudden turns except emergencies.
- 3. Do not keep the machine in the same position with pad / brush spinning, keep the machine moving to prevent damage to floor finish.
- 4. If the squeegee assembly leaves streaks on the floor, raise the squeegee off the floor and wipe the blades down with a damp cloth. Pre-sweep the area to prevent leaving streaks on the floor.
- 5. To obtain the optimum cleaning performance, you can adjust the brush pressure, solution flow and detergent dosage as your required. If poor picking up water performance is observed, please stop scrubbing and check the squeegee blade, adjust or replace if necessary.
- 6. If the dirty water path exceed the width of squeegee, please adjust the side squeegee assembly.
- 7. Pour a recommended defoamer into the recovery tank if excessive foam appears.

WARNING: The foam do not activate water level switch, excessive foam may result in vacuum motor damage.

- 8. Press the Horn button (Machine components, #27) to alert if necessary.
- 9. The machine is equipped with a Warning light (Machine components, #21), you can select turn ON or OFF by the Warning light button (Machine components, #40).
- 10. If there have Fault icon display and blinking on the touch screen, please stop using the machine and to eliminate the fault (Please see FAULT CODES AND ELIMINATE section).
- For heavily soiled areas, please use HEAVY DUTY SCRUBBING mode by work mode select button.
- 12. If you only want to pick up water needn't scrubbing, Turn on the Vacuum motor button(Machine components, #38), the squeegee will lower down, and turn off the 1-Step starting button (if it is ON), the scrub head will raise and then start to picking water up.

TANK DRAINING

DRAINING THE RECOVERY TANK

Any time scrubbing is completed, or when refilling solution tank, the recovery tank should be drained and cleaned.

MARNING: If the recovery tank is not drained when the solution tank has been refilled, foam or water may enter the float shutoff screen and cause damage to the vacuum motor.

- 1. While holding the Recovery tank drain hose (Machine components, #41) upward, remove the cap and lower hose to drain.
- 2. Open the Recovery tank cover (Machine components, #22) and rinse out the tank. Use a rag to remove any excess dirt.
- 3. Remove and clean the vacuum fan inlet filter located in the recovery tank. Clean the filter with a damp cloth or low pressure water hose if dirty. Allow the vacuum fan filter to dry completely before reinstalling it in the machine.

DRAINING THE SOLUTION TANK

Any time scrubbing operation is completed, the solution tank should be drained and cleaned.

- 1. While holding the Solution tank drain hose (Machine components, #43) upward, remove the cap and lower hose to drain.
- 2. Rinse the solution tank with clean water after every use. This will help prevent chemical buildup and clogging of the solution lines.

BATTERY CHARGING

WARNING: Fire or Explosion Hazard.

Keep Sparks and Open Flame Away. Keep **Battery Compartment Propped Open When** Charging.

Use only ICE supplied or approved batteries charger, use unapproved charger may cause damage to the batteries and machine.

Batteries charger specifications:

- Applicable to charging Lithium-ion batteries
- Automatic shut off circuit
- **Output current of 30 Amps**
- **Output voltage of 24 volts**
- 1. Transport the machine to a well ventilated area.
- 2. Turn the machine off.
- 3. Prop up the Operator seat by the support stand for ventilation.
- 4. Connect the charger's AC power supply cord to a properly grounded receptable.
- 5. The charger will automatically begin to charge, you can watching the charging status on the window (Machine components, #20), once the charging cycle begins, the indicator lights will progress from red, yellow to green. when the green indicator light comes on, the charging cycle is done. Unplug the charger cord.

NOTE: The machine will can not operate when charging.

PREVENTATIVE MAINTENANCE

WARNING: Before performing any maintenance on the machine, be sure that the power is turned off, or the batteries are disconnected!

WARING: Repairs are to be completed by Authorized service centers only. Any repairs completed by unauthorized persons will avoid the warrenty.

DAILY MAINTENANCE

- 1. Remove pad driver/ brush and clean with approved cleaner.
- Drain recovery and solution tanks completely and rinse out with clean water. Visually check the recovery tank for debris and clean out as necessary.
- Raise the squeegee assembly off floor and wipe it down with a damp towel. Be sure to store the squeegee in the up position.
- 4. Remove the vacuum fan inlet filter and rinse it out with clean water.
- 5. Clean machine with an approved cleaner and a damp towel.
- 6. Recharge the batteries.
- 7. Check the condition of the squeegee blade wiping edge, rotate blade if worn.

MONTHLY MAINTENANCE

- 1. Clean the battery tops to prevent corrosion.
- 2. Check for loose battery cable connections.
- 3. Inspect and clean the recovery tank cover seal. Replace it if damaged.
- 4. Lubricate all grease points and pivot points with silicon spray and approved grease.
- 5. Check the machine for loose nuts and bolts.
- 6. Check the machine for leaks.

MACHINE STORAGE

- 1. Always store the machine indoors.
- 2. Always store the machine in a dry area.
- 3. Always store the machine in its upright position.
- 4. Always store the machine with the pad driver/brush raised off the floor.
- 5. Always store the machine with the squeegee assembly raised off the floor.
- If storing in an area which may reach freezing temperatures, be sure to drain all fluids from the machine prior to storage. Any damage caused by freezing temperatures will not be covered by the warranty.
- 7. Drain the recovery tank.
- 8. Drain the solution tank of all fluid.

FAULT CODE & SOLUTION

The machine equipped with a 7-inch touch screen (Machine components, # 14), the touch screen will display Battery meter (Machine components, #28), Date and Time (Machine components, #29), and Working accumulated hours (Machine components, #34).

When the machine detects a fault, there will have a Fault icon blinking (Machine components, #39) on the touch screen accompany an audible alarm Occasionally.

The Fault icon have 2 colors. Yellow icon represents a low level fault, you can click it to pop up a fault message window, it will guide you how to eliminate the fault.

Red icon represents a serious fault, the fault message window will pop up automatiaclly, you can not close it unless the fault be eliminated.

Once the fault icon occuring, please DO NOT continue operate machine unless the faults are eliminated.

Turn off the machine, then to solve the fault, the fault icon will be eliminated when machine restart.

If the fault icon is occurred frequently, or can't be eliminated, please contact ICE service center.

Please refer to the below table to determine the fault cause and the solution.

FAULT CODE & SOLUTION


Sti In seat Squeegee or Scrub head Actuator Overload Check Squeegee or Scrub head Actuator Check Brush Motor (Left) Squeegee or Scrub head Actuator Check Brush Motor (Left) Check Brush Motor (Left) Check Brush Motor (Right) Check Brush Motor (Right) Check Brush Motor (Right) Check Brush Motor (Right) Check Drive Motor	FAULT	FAULT MESSAGE	SOLUTION
F02 Squeegee or Scrub head Actuator Overload F04 Vacuum Motor Overload F05 Brush Motor (Left) Overload Check Vacuum Motor F06 Brush Motor (Right) Overload Check Brush Motor (Right) F07 Drive Motor Overload Check Drive Motor F08 Recovery Tank Full Drive Motor Overload Check Drive Motor F08 Recovery Tank Full Drive Motor Overload Check Drive Motor F09 Solution Tank Empty F10 Battery Low Charge battery F11 Battery Discharged Charge battery F12 Brake Open Circuit Check brake wiring F13 Release Accelerate Pedal F14 Brake Short Circuit Check brake wiring F15 Main Controller Overheat F16 Main Controller Overheat F17 Srush Motor (Left) Wiring and Connector F19 Brake Sensor Open Circuit Check Brake Minor F19 Brake Sensor Open Circuit Check Brake Wiring F10 Brake Sensor Open Circuit Check Brake Wiring F11 Wacuum motor Open Circuit Check Brake Wiring F12 Vacuum motor Open Circuit Check Solenoid Valve Wiring and Connector F11 Vacuum motor Open Circuit Check Solenoid Valve Wiring and Connector F12 Solenoid Valve Open Circuit Check Drive motor wiring and Connector F13 Brush Motor (Left) Open Circuit Check Drive motor wiring and Connector F14 Drive Motor Open Circuit Check Drive motor wiring and Connector F15 Brush Motor (Right) Open Circuit Check Drive motor Wiring and Connector F16 Brush Motor (Right) Open Circuit Check Drive motor Wiring and Connector F17 Check Brush Motor (Right) Wiring and Connector F18 Brush Motor (Right) Open Circuit Check Drive motor Wiring and Connector F19 Brush Motor (Right) Open Circuit Check Brush Motor (Right) Wiring and Connector F19 Detergent Pump Open Circuit Check Brush Motor (Right) Wiring and Connector F19 Detergent Pump Open Circuit Check Brush Motor (Right) Wiring and Connector F19 Detergent Pump Open Circuit Check Scrub head actuator Wiring and Connector F19 Detergent Pump Open Circuit Check Scrub head actuator Wiring and Connector F19 Detergent Pump Open Circuit Check Scrub head actuator Wiring and Connector F19 Detergent Pump Open Circuit Check Brush Motor (Right) Wiring and Connector	—		Sit in coat
F04 Vacuum Motor Overload Check Vacuum Motor F05 Brush Motor (Left) Overload Check Brush Motor (Left) F06 Brush Motor (Right) Overload Check Brush Motor (Right) F07 Drive Motor Overload Check Brush Motor (Right) F08 Recovery Tank Full Drain Recovery tank F09 Solution Tank Empty Refill Solution tank F10 Battery Low Charge battery F11 Battery Discharged Charge battery Immediately F12 Brake Open Circuit Check brake wiring F13 Release Accelerate Pedal Release the propel pedal F14 Brake Short Circuit Check brake wiring F16 Main Controller Overheat Turn off the machine and re-start after a while F17 Brake Sensor Open Circuit Check Brake sensor F18 Accelerator Sensor Open Circuit Check Brake Sensor F19 Brake Sensor Open Circuit Check Brush Motor (Left) Wiring and Connector F10 Brush Motor (Left) Open Circuit Check Brush Motor (Left) Wiring and Connector F11 Vacuum motor Open Circuit Check Solenoid valve Wiring and Connector F12 Solenoid Valve Short Circuit Check Solenoid valve Wiring and Connector F13 Solenoid Valve Open Circuit Check Solenoid valve Wiring and Connector F14 Vacuum motor Open Circuit Check Solenoid valve Wiring and Connector F15 Solenoid Valve Open Circuit Check Solenoid valve Wiring and Connector F18 Prush Motor (Right) Open Circuit Check Solenoid valve Wiring and Connector F19 Brush Motor (Right) Open Circuit Check Brush Motor (Right) Wiring and Connector F19 Brush Motor (Right) Open Circuit Check Brush Motor (Right) Wiring and Connector F10 Wheel Paluse Sensor Fault Check Brush Motor (Right) Wiring and Connector F10 Wheel Paluse Sensor Fault Check Brush Motor (Right) Wiring and Connector F19 Main Controller Fault Replace Main controller F19 Main Controller Fault Replace Main controller F19 Main Controller Fault Replace Main controller F19 Main Relay (#1) Short Circuit Check Brush Motor (Right) Wiring and Connector F19 Detergent Pump Short Circuit Check Main Relay (#1) Wiring and Connector F19 Squege Actuator Open Circuit Check Main Relay (#1) Wiring and Connector F19 Main Relay (#2) Short Circuit Ch	\vdash		
Brush Motor (Left) Overload Check Brush Motor (Right) Overload Check Brush Motor (Right) Overload Check Brush Motor (Right)			
Fo6 Brush Motor (Right) Overload Check Brush Motor (Right)			
F07 Drive Motor Overload Check Drive Motor F08 Recovery Tank Full Drain Recovery tank F09 Solution Tank Empty Refill Solution tank F10 Battery Low Charge battery F11 Battery Discharged Charge battery Immediately F12 Brake Open Circuit Check brake wiring F13 Release Accelerate Pedal Release the propel pedal F14 Brake Short Circuit Check brake wiring F16 Main Controller Overheat Turn off the machine and re-start after a while F17 Accelerator Sensor Open Circuit Check Brake sensor F19 Brake Sensor Open Circuit Check Brake sensor F19 Brake Sensor Open Circuit Check Brake sensor F10 Brake Sensor Open Circuit Check Brush Motor (Left) Wiring and Connector F11 Vacuum motor Open Circuit Check Vacuum motor Wiring and Connector F12 Vacuum motor Open Circuit Check Solenoid valve Wiring and Connector F13 Solenoid Valve Open Circuit Check Solenoid valve Wiring and Connector F14 Drive Motor Open Circuit Check Brush Motor (Right) Wiring and Connector F15 Brush Motor (Right) Open Circuit Check Brush Motor (Right) Wiring and Connector F16 Wheel Paluse Sensor Fault Check Proximity switch F17 Bray Bray Bray Bray Bray Bray Bray Bray			, ,
Pos	\vdash	, , ,	, ,
F09 Solution Tank Empty Refill Solution tank F10 Battery Low Charge battery Charge battery Immediately F12 Brake Open Circuit Check brake wiring F13 Release Accelerate Pedal Release the propel pedal F14 Brake Short Circuit Check brake wiring F16 Main Controller Overheat Turn off the machine and re-start after a while F17 Accelerator Sensor Open Circuit Check Brake sensor F19 Brake Sensor Open Circuit Check Brake sensor F19 Brake Sensor Open Circuit Check Brake sensor F10 Brake Sensor Open Circuit Check Brake Sensor F10 Brake Sensor Open Circuit Check Brake Sensor F11 Vacuum motor Open Circuit Check Brake Sensor F12 Vacuum motor Open Circuit Check Solenoid valve Wiring and Connector F12 Vacuum motor Open Circuit Check Solenoid valve Wiring and Connector F12 Solenoid Valve Open Circuit Check Solenoid valve Wiring and Connector F12 Drive Motor Open Circuit Check Solenoid valve Wiring and Connector F12 Drive Motor Open Circuit Check Dolenoid valve Wiring and Connector F12 Drive Motor Open Circuit Check Drive motor wiring and Connector F12 Drive Motor Open Circuit Check Drive motor wiring and Connector F12 Drive Motor Open Circuit Check Brush Motor (Right) Wiring and Connector F13 Brush Motor (Right) Open Circuit Check Brush Motor (Right) Wiring and Connector F14 Wheel Paluse Sensor Fault Check Proximity switch F15 Emergency Stop Release Emergency stop button F16 Main Controller Fault Replace Main controller F17 Detergent Pump Short Circuit Check Detergent pump Wiring and Connector F18 Detergent Pump Short Circuit Check Scrub head actuator Wiring and Connector F19 F1			
F10 Battery Low Charge battery F11 Battery Discharged Charge battery Immediately F12 Brake Open Circuit Check brake wiring F13 Release Accelerate Pedal Release the propel pedal F14 Brake Short Circuit Check brake wiring F16 Main Controller Overheat Turn off the machine and re-start after a while F18 Accelerator Sensor Open Circuit Check Brake sensor F19 Brake Sensor Open Circuit Check Brake sensor F20 Brush Motor (Left) Open Circuit Check Brush Motor (Left) Wiring and Connector F21 Vacuum motor Open Circuit Check Vacuum motor Wiring and Connector F22 Solenoid Valve Short Circuit Check Solenoid valve Wiring and Connector F23 Solenoid Valve Open Circuit Check Drive motor wiring and Connector F24 Drive Motor Open Circuit Check Drive motor wiring and Connector F25 Brush Motor (Right) Open Circuit Check Drive motor wiring and Connector F26 Brush Motor (Right) Open Circuit Check Drive motor wiring and Connector F27 Solenoid Valve Spen Circuit Check Drive motor wiring and Connector F28 Brush Motor (Right) Open Circuit Check Drive motor wiring and Connector F29 Drive Motor Open Circuit Check Drive motor wiring and Connector F20 Wheel Paluse Sensor Fault Check Drive motor wiring and Connector F21 Wacuum motor Open Circuit Check Drive motor wiring and Connector F22 Brush Motor (Right) Open Circuit Check Drive motor wiring and Connector F23 Detergent Pump Short Circuit Check Detergent pump Wiring and Connector F24 Detergent Pump Open Circuit Check Detergent pump Wiring and Connector F25 Scrub Head Actuator Open Circuit Check Squeegee actuator Wiring and Connector F26 Squeegee Actuator Open Circuit Check Squeegee actuator Wiring and Connector F27 Flashing Light Short Circuit Check Main Relay (#1) Wiring and Connector F28 Flashing Light Open Circuit Check Main Relay (#1) Wiring and Connector F29 Main Relay (#2) Short Circuit Check Main Relay (#1) Wiring and Connector F29 Drive Motor Short Circuit Check Main Relay (#2) Wiring and Connector F29 Vacuum Motor Short Circuit Check Brush Motor (Right)	\vdash	•	
F11 Battery Discharged Charge battery Immediately F12 Brake Open Circuit Check brake wiring F13 Release Accelerate Pedal Release the propel pedal F14 Brake Short Circuit Check brake wiring F16 Main Controller Overheat Turn off the machine and re-start after a while F17 Accelerator Sensor Open Circuit Check accelerator sensor F19 Brake Sensor Open Circuit Check Brake sensor F20 Brush Motor (Left) Open Circuit Check Brush Motor (Left) Wiring and Connector F21 Vacuum motor Open Circuit Check Vacuum motor Wiring and Connector F22 Solenoid Valve Short Circuit Check Solenoid valve Wiring and Connector F23 Solenoid Valve Open Circuit Check Solenoid valve Wiring and Connector F24 Drive Motor Open Circuit Check Drive motor wiring and Connector F25 Brush Motor (Right) Open Circuit Check Drive motor wiring and Connector F26 Brush Motor (Right) Open Circuit Check Proximity switch F40 Wheel Paluse Sensor Fault Check Proximity switch F43 Emergency Stop Release Emergency stop button F49 Main Controller Fault Replace Main controller F50 Main Controller Fault Replace Main controller F51 Detergent Pump Short Circuit Check Detergent pump Wiring and Connector F52 Scrub Head Actuator Open Circuit Check Scrub head actuator Wiring and Connector F53 Detergent Pump Open Circuit Check Scrub head actuator Wiring and Connector F54 Detergent Pump Open Circuit Check Scrub head actuator Wiring and Connector F55 Scrub Head Actuator Open Circuit Check Relashing light Wiring and Connector F56 Squeegee Actuator Open Circuit Check Relashing light Wiring and Connector F57 Flashing Light Short Circuit Check Main Relay (#1) Wiring and Connector F68 Rian Relay (#1) Open Circuit Check Main Relay (#1) Wiring and Connector F69 Main Relay (#2) Short Circuit Check Main Relay (#2) Wiring and Connector F60 Drive Motor Short Circuit Check Main Relay (#2) Wiring and Connector F61 Drive Motor Short Circuit Check Brush Motor (Right) Wiring and Connector F69 Drive Motor Short Circuit Check Brush Motor (Wight) Wiring and Connector F69 Vacuum Motor Short Circuit C			
F12 Brake Open Circuit Check brake wiring F13 Release Accelerate Pedal Release the propel pedal F14 Brake Short Circuit Check brake wiring F16 Main Controller Overheat Turn off the machine and re-start after a while F18 Accelerator Sensor Open Circuit Check Brake sensor F19 Brake Sensor Open Circuit Check Brake sensor F19 Brake Sensor Open Circuit Check Brush Motor (Left) Wiring and Connector F20 Brush Motor (Left) Open Circuit Check Brush Motor (Left) Wiring and Connector F21 Vacuum motor Open Circuit Check Solenoid valve Wiring and Connector F22 Solenoid Valve Short Circuit Check Solenoid valve Wiring and Connector F23 Solenoid Valve Open Circuit Check Drive motor wiring and Connector F24 Drive Motor Open Circuit Check Drive motor wiring and Connector F25 Brush Motor (Right) Open Circuit Check Brush Motor (Right) Wiring and Connector F26 Wheel Paluse Sensor Fault Check Proximity switch F40 Wheel Paluse Sensor Fault Replace Main controller F41 Emergency Stop Release Emergency stop button F42 Main Controller Fault Replace Main controller F43 Detergent Pump Short Circuit Check Detergent pump Wiring and Connector F44 Detergent Pump Open Circuit Check Detergent pump Wiring and Connector F55 Scrub Head Actuator Open Circuit Check Scrub head actuator Wiring and Connector F56 Squeegee Actuator Open Circuit Check Flashing light Wiring and Connector F57 Flashing Light Short Circuit Check Flashing light Wiring and Connector F58 Flashing Light Open Circuit Check Main Relay (#1) Wiring and Connector F69 Main Relay (#2) Short Circuit Check Main Relay (#2) Wiring and Connector F60 Main Relay (#2) Short Circuit Check Main Relay (#2) Wiring and Connector F61 Main Relay (#2) Short Circuit Check Main Relay (#2) Wiring and Connector F65 Brush Motor (Right) Short Circuit Check Main Relay (#2) Wiring and Connector F66 Brush Motor (Right) Short Circuit Check Brush Motor (Left) Wiring and Connector F67 Brush Motor (Right) Short Circuit Check Brush Motor (Left) Wiring and Connector F68 Brush Motor (Left) Short Circuit Check Brush Mot		<u> </u>	
F13 Release Accelerate Pedal Release the propel pedal F14 Brake Short Circuit Check brake wiring F16 Main Controller Overheat Turn off the machine and re-start after a while F18 Accelerator Sensor Open Circuit Check accelerator sensor F19 Brake Sensor Open Circuit Check Brake sensor F20 Brush Motor (Left) Open Circuit Check Brush Motor (Left) Wiring and Connector F21 Vacuum motor Open Circuit Check Solenoid valve Wiring and Connector F22 Solenoid Valve Short Circuit Check Solenoid valve Wiring and Connector F23 Solenoid Valve Open Circuit Check Drive motor wiring and Connector F24 Drive Motor Open Circuit Check Brush Motor (Right) Wiring and Connector F25 Brush Motor (Right) Open Circuit Check Proximity switch F40 Wheel Paluse Sensor Fault Check Proximity switch F43 Emergency Stop Release Emergency stop button F49 Main Controller Fault Replace Main controller F50 Main Controller Fault Replace Main controller F53 Detergent Pump Short Circuit </td <td>\vdash</td> <td></td> <td></td>	\vdash		
F14 Brake Short Circuit Check brake wiring F16 Main Controller Overheat Turn off the machine and re-start after a while F18 Accelerator Sensor Open Circuit Check Brake sensor F19 Brake Sensor Open Circuit Check Brake sensor F20 Brush Motor (Left) Open Circuit Check Brake sensor F21 Vacuum motor Open Circuit Check Vacuum motor Wiring and Connector F22 Solenoid Valve Short Circuit Check Solenoid valve Wiring and Connector F23 Solenoid Valve Open Circuit Check Solenoid valve Wiring and Connector F24 Drive Motor Open Circuit Check Drive motor wiring and Connector F25 Brush Motor (Right) Open Circuit Check Brush Motor (Right) Wiring and Connector F26 Brush Motor (Right) Open Circuit Check Brush Motor (Right) Wiring and Connector F27 Wheel Paluse Sensor Fault Check Proximity switch F40 Wheel Paluse Sensor Fault Check Proximity switch F41 Emergency Stop Release Emergency stop button F42 Main Controller Fault Replace Main controller F43 Emergency Stop Release Emergency stop button F44 Replace Main controller F55 Detergent Pump Short Circuit Check Detergent pump Wiring and Connector F56 Detergent Pump Open Circuit Check Detergent pump Wiring and Connector F57 Detergent Pump Open Circuit Check Scrub head actuator Wiring and Connector F58 Flashing Light Short Circuit Check Squeegee actuator Wiring and Connector F59 Flashing Light Open Circuit Check Flashing light Wiring and Connector F50 Main Relay (#1) Short Circuit Check Main Relay (#1) Wiring and Connector F58 Flashing Light Open Circuit Check Main Relay (#1) Wiring and Connector F59 Flashing Light Open Circuit Check Main Relay (#1) Wiring and Connector F60 Main Relay (#2) Short Circuit Check Main Relay (#2) Wiring and Connector F61 Main Relay (#2) Open Circuit Check Main Relay (#2) Wiring and Connector F62 Main Relay (#2) Open Circuit Check Main Relay (#2) Wiring and Connector F64 Main Relay (#2) Open Circuit Check Main Relay (#2) Wiring and Connector F65 Drive Motor Short Circuit Check Brush Motor (Right) Wiring and Connector F66 Brush Motor (Right) Short Circuit Che			
F16 Main Controller Overheat F18 Accelerator Sensor Open Circuit F19 Brake Sensor Open Circuit F20 Brush Motor (Left) Open Circuit F21 Vacuum motor Open Circuit F22 Solenoid Valve Short Circuit F23 Solenoid Valve Open Circuit F24 Drive Motor Open Circuit F25 Brush Motor (Right) Open Circuit F26 Brush Motor (Right) Open Circuit F27 Solenoid Valve Open Circuit F28 Brush Motor (Right) Open Circuit F29 Brush Motor (Right) Open Circuit F29 Brush Motor (Right) Open Circuit F20 Brush Motor Open Circuit F21 Check Brush Motor (Right) Wiring and Connector F22 Brush Motor (Right) Open Circuit F23 Brush Motor (Right) Open Circuit F44 Drive Motor Open Circuit F45 Brush Motor (Right) Open Circuit F46 Wheel Paluse Sensor Fault F47 Check Proximity switch F48 Emergency Stop F49 Release Emergency Stop button F49 Main Controller Fault F40 Replace Main controller F50 Main Controller Fault F51 Detergent Pump Short Circuit F52 Check Detergent pump Wiring and Connector F53 Detergent Pump Open Circuit F54 Detergent Pump Open Circuit F55 Scrub Head Actuator Open Circuit F56 Squeegee Actuator Open Circuit F57 Flashing Light Short Circuit F58 Flashing Light Short Circuit F59 Flashing Light Open Circuit F50 Main Relay (#1) Short Circuit F61 Main Relay (#1) Open Circuit F62 Main Relay (#1) Open Circuit F63 Main Relay (#1) Open Circuit F64 Main Relay (#2) Short Circuit F65 Drive Motor Short Circuit F66 Drive Motor Short Circuit F67 Drive Motor Short Circuit F68 Brush Motor (Right) Short Circuit F69 Vacuum Motor Short Circuit F69 Vacuum Motor Short Circuit F60 Scrub Head Actuator Wiring and Connector F60 Check Srub Head Actuator Wiring and Connector F60 Check Brush Motor (Right) Wiring and Connector F60 Check Scrub Head actuator Wiring and Connector F60 Check Scrub Head actuator Wiring a			
F18 Accelerator Sensor Open Circuit F19 Brake Sensor Open Circuit Check Brake sensor F20 Brush Motor (Left) Open Circuit Check Brush Motor (Left) Wiring and Connector F21 Vacuum motor Open Circuit Check Solenoid valve Wiring and Connector F22 Solenoid Valve Short Circuit Check Solenoid valve Wiring and Connector F23 Solenoid Valve Open Circuit Check Solenoid valve Wiring and Connector F24 Drive Motor Open Circuit Check Drive motor wiring and Connector F25 Brush Motor (Right) Open Circuit Check Brush Motor (Right) Wiring and Connector F40 Wheel Paluse Sensor Fault Check Proximity switch F43 Emergency Stop Release Emergency stop button F49 Main Controller Fault Replace Main controller F50 Main Controller Fault Replace Main controller F51 Detergent Pump Short Circuit Check Detergent pump Wiring and Connector F52 Detergent Pump Open Circuit Check Detergent pump Wiring and Connector F53 Scrub Head Actuator Open Circuit Check Scrub head actuator Wiring and Connector F56 Squeegee Actuator Open Circuit Check Squeegee actuator Wiring and Connector F57 Flashing Light Short Circuit Check Flashing light Wiring and Connector F58 Flashing Light Open Circuit Check Main Relay (#1) Short Circuit Check Main Relay (#1) Wiring and Connector F69 Main Relay (#2) Open Circuit Check Main Relay (#1) Wiring and Connector F60 Main Relay (#2) Short Circuit Check Main Relay (#2) Wiring and Connector F60 Brush Motor (Left) Short Circuit Check Brush Motor (Well) Wiring and Connector F60 Brush Motor (Right) Short Circuit Check Brush Motor (Well) Wiring and Connector F60 Brush Motor (Right) Short Circuit Check Brush Motor (Well) Wiring and Connector F60 Check Brush Motor (Wiring and Connector F60 Check Brush Motor (Wiring and Connector F60 Check Brush Motor (Wiring and Connector F60 Check Brush Mot			
F19 Brake Sensor Open Circuit Check Brake sensor F20 Brush Motor (Left) Open Circuit Check Brush Motor (Left) Wiring and Connector F21 Vacuum motor Open Circuit Check Solenoid valve Wiring and Connector F22 Solenoid Valve Short Circuit Check Solenoid valve Wiring and Connector F23 Solenoid Valve Open Circuit Check Solenoid valve Wiring and Connector F24 Drive Motor Open Circuit Check Drive motor wiring and Connector F25 Brush Motor (Right) Open Circuit Check Brush Motor (Right) Wiring and Connector F40 Wheel Paluse Sensor Fault Check Proximity switch F43 Emergency Stop Release Emergency stop button F49 Main Controller Fault Replace Main controller F50 Main Controller Fault Replace Main controller F51 Detergent Pump Short Circuit Check Detergent pump Wiring and Connector F52 Scrub Head Actuator Open Circuit Check Detergent pump Wiring and Connector F53 Scrub Head Actuator Open Circuit Check Scrub head actuator Wiring and Connector F54 Squeegee Actuator Open Circuit Check Squeegee actuator Wiring and Connector F55 Scrub Head Actuator Open Circuit Check Flashing light Wiring and Connector F56 Squeegee Actuator Open Circuit Check Riashing light Wiring and Connector F57 Flashing Light Short Circuit Check Main Relay (#1) Wiring and Connector F68 Main Relay (#1) Open Circuit Check Main Relay (#1) Wiring and Connector F69 Main Relay (#2) Open Circuit Check Main Relay (#2) Wiring and Connector F60 Drive Motor Short Circuit Check Main Relay (#2) Wiring and Connector F60 Brush Motor (Left) Short Circuit Check Brush Motor (Left) Wiring and Connector F60 Brush Motor (Right) Short Circuit Check Brush Motor (Right) Wiring and Connector F60 Check Brush Motor (Right) Wiring and Connector F61 Brush Motor (Right) Short Circuit Check Brush Motor (Right) Wiring and Connector F62 Check Brush Motor (Right) Wiring and Connector F63 Check Brush Motor (Right) Wiring and Connector F64 Check Brush Motor (Right) Wiring and Connector F65 Check Brush Motor (Right) Wiring and Connector F66 Check Brush Motor (Right) Wiring and Connector F67 Ch	\vdash		
F20Brush Motor (Left) Open CircuitCheck Brush Motor (Left) Wiring and ConnectorF21Vacuum motor Open CircuitCheck Vacuum motor Wiring and ConnectorF22Solenoid Valve Short CircuitCheck Solenoid valve Wiring and ConnectorF23Solenoid Valve Open CircuitCheck Drive motor wiring and ConnectorF24Drive Motor Open CircuitCheck Brush Motor (Right) Wiring and ConnectorF25Brush Motor (Right) Open CircuitCheck Brush Motor (Right) Wiring and ConnectorF40Wheel Paluse Sensor FaultCheck Proximity switchF43Emergency StopRelease Emergency stop buttonF49Main Controller FaultReplace Main controllerF50Main Controller FaultReplace Main controllerF51Detergent Pump Short CircuitCheck Detergent pump Wiring and ConnectorF52Detergent Pump Open CircuitCheck Detergent pump Wiring and ConnectorF55Scrub Head Actuator Open CircuitCheck Scrub head actuator Wiring and ConnectorF56Squeegee Actuator Open CircuitCheck Squeegee actuator Wiring and ConnectorF57Flashing Light Short CircuitCheck Flashing light Wiring and ConnectorF61Main Relay (#1) Short CircuitCheck Main Relay (#1) Wiring and ConnectorF62Main Relay (#1) Open CircuitCheck Main Relay (#2) Wiring and ConnectorF63Main Relay (#2) Short CircuitCheck Main Relay (#2) Wiring and ConnectorF64Main Relay (#2) Open CircuitCheck Main Relay (#2) Wiring and ConnectorF65Drive Motor Short CircuitChe		·	
F21 Vacuum motor Open Circuit F22 Solenoid Valve Short Circuit F23 Solenoid Valve Open Circuit F24 Drive Motor Open Circuit F25 Brush Motor (Right) Open Circuit F26 Brush Motor (Right) Open Circuit F27 Check Brush Motor (Right) Wiring and Connector F28 Brush Motor (Right) Open Circuit F29 Brush Motor (Right) Open Circuit F20 Wheel Paluse Sensor Fault F21 Check Proximity switch F22 Brush Motor (Right) Open Circuit F23 Check Proximity switch F24 Check Proximity switch F25 Brush Motor (Right) Wiring and Connector F26 Main Controller Fault F27 Replace Main controller F28 Detergent Pump Short Circuit F29 Check Detergent pump Wiring and Connector F29 Check Detergent pump Wiring and Connector F20 Detergent Pump Open Circuit F21 Check Detergent pump Wiring and Connector F22 Check Scrub head actuator Wiring and Connector F23 Check Squeegee actuator Wiring and Connector F24 Detergent Pump Open Circuit F25 Check Squeegee actuator Wiring and Connector F26 Squeegee Actuator Open Circuit F27 Flashing Light Short Circuit F28 Flashing Light Open Circuit F29 Check Flashing light Wiring and Connector F20 Main Relay (#1) Short Circuit F20 Check Main Relay (#1) Wiring and Connector F31 Main Relay (#2) Short Circuit F32 Check Main Relay (#2) Wiring and Connector F33 Main Relay (#2) Open Circuit F44 Check Main Relay (#2) Wiring and Connector F45 Drive Motor Short Circuit F46 Check Main Relay (#2) Wiring and Connector F47 Brush Motor (Left) Short Circuit F48 Check Brush Motor (Left) Wiring and Connector F49 Check Brush Motor (Right) Wiring and Connector F40 Check Brush Motor (Right) Wi		·	
F22 Solenoid Valve Short Circuit Check Solenoid valve Wiring and Connector F23 Solenoid Valve Open Circuit Check Solenoid valve Wiring and Connector F24 Drive Motor Open Circuit Check Brush Motor (Right) Open Circuit Check Brush Motor (Right) Wiring and Connector F25 Brush Motor (Right) Open Circuit Check Brush Motor (Right) Wiring and Connector F40 Wheel Paluse Sensor Fault Check Proximity switch F43 Emergency Stop Release Emergency stop button F49 Main Controller Fault Replace Main controller F50 Main Controller Fault Replace Main controller F51 Detergent Pump Short Circuit Check Detergent pump Wiring and Connector F52 Detergent Pump Open Circuit Check Detergent pump Wiring and Connector F53 Scrub Head Actuator Open Circuit Check Scrub head actuator Wiring and Connector F54 Detergent Pump Open Circuit Check Squeegee actuator Wiring and Connector F55 Scrub Head Actuator Open Circuit Check Squeegee actuator Wiring and Connector F56 Squeegee Actuator Open Circuit Check Flashing light Wiring and Connector F57 Flashing Light Open Circuit Check Flashing light Wiring and Connector F58 Flashing Light Open Circuit Check Main Relay (#1) Wiring and Connector F60 Main Relay (#1) Short Circuit Check Main Relay (#1) Wiring and Connector F61 Main Relay (#2) Short Circuit Check Main Relay (#2) Wiring and Connector F62 Main Relay (#2) Open Circuit Check Main Relay (#2) Wiring and Connector F63 Drive Motor Short Circuit Check Main Relay (#2) Wiring and Connector F64 Main Relay (#2) Open Circuit Check Brush Motor (Left) Wiring and Connector F65 Drive Motor Short Circuit Check Brush Motor (Right) Wiring and Connector F68 Brush Motor (Right) Short Circuit Check Vacuum Motor Wiring and Connector F69 Vacuum Motor Short Circuit Check Scrub head actuator Wiring and Connector	F20	Brush Motor (Left) Open Circuit	Check Brush Motor (Left) Wiring and Connector
Solenoid Valve Open Circuit Check Solenoid valve Wiring and Connector F24 Drive Motor Open Circuit Check Drive motor wiring and Connector F25 Brush Motor (Right) Open Circuit Check Brush Motor (Right) Wiring and Connector F40 Wheel Paluse Sensor Fault Check Proximity switch F43 Emergency Stop Release Emergency stop button F49 Main Controller Fault Replace Main controller F50 Main Controller Fault Replace Main controller F51 Detergent Pump Short Circuit Check Detergent pump Wiring and Connector F52 Scrub Head Actuator Open Circuit Check Detergent pump Wiring and Connector F53 Scrub Head Actuator Open Circuit Check Scrub head actuator Wiring and Connector F54 Check Squeegee actuator Wiring and Connector F55 Scrub Head Actuator Open Circuit Check Squeegee actuator Wiring and Connector F56 Flashing Light Short Circuit Check Flashing light Wiring and Connector F58 Flashing Light Open Circuit Check Flashing light Wiring and Connector F61 Main Relay (#1) Short Circuit Check Main Relay (#1) Wiring and Connector F62 Main Relay (#2) Short Circuit Check Main Relay (#2) Wiring and Connector F63 Main Relay (#2) Open Circuit Check Main Relay (#2) Wiring and Connector F64 Main Relay (#2) Open Circuit Check Main Relay (#2) Wiring and Connector F65 Drive Motor Short Circuit Check Drive Motor Wiring and Connector F67 Brush Motor (Left) Short Circuit Check Brush Motor (Right) Wiring and Connector F68 Brush Motor (Right) Short Circuit Check Brush Motor (Wiring and Connector F69 Vacuum Motor Short Circuit Check Scrub head actuator Wiring and Connector	F21	Vacuum motor Open Circuit	Check Vacuum motor Wiring and Connector
F24 Drive Motor Open Circuit F25 Brush Motor (Right) Open Circuit F26 Brush Motor (Right) Open Circuit F27 Check Brush Motor (Right) Wiring and Connector F28 Check Brush Motor (Right) Wiring and Connector F29 Check Proximity switch F29 Release Emergency stop button F29 Main Controller Fault F20 Main Controller Fault F21 Replace Main controller F22 Detergent Pump Short Circuit F23 Detergent Pump Short Circuit F24 Detergent Pump Open Circuit F25 Crub Head Actuator Open Circuit F26 Squeegee Actuator Open Circuit F27 Check Scrub head actuator Wiring and Connector F28 Flashing Light Open Circuit F29 Check Flashing light Wiring and Connector F30 Main Relay (#1) Short Circuit F31 Check Flashing light Wiring and Connector F32 Check Flashing light Wiring and Connector F33 Check Main Relay (#1) Wiring and Connector F44 Main Relay (#1) Open Circuit F45 Check Main Relay (#1) Wiring and Connector F46 Main Relay (#2) Open Circuit F47 Check Main Relay (#2) Wiring and Connector F48 Drive Motor Short Circuit F49 Check Main Relay (#2) Wiring and Connector F40 Drive Motor Short Circuit F40 Check Drive Motor Wiring and Connector F41 Check Drive Motor Wiring and Connector F42 Check Drive Motor Wiring and Connector F43 Check Drive Motor Wiring and Connector F44 Check Drive Motor Wiring and Connector F45 Drive Motor Short Circuit Check Drive Motor Wiring and Connector F46 Drive Motor Short Circuit Check Brush Motor (Left) Wiring and Connector F48 Brush Motor (Right) Short Circuit Check Brush Motor Wiring and Connector F49 Vacuum Motor Short Circuit Check Scrub head actuator Wiring and Connector F40 Scrub Head Actuator Short Circuit Check Scrub head actuator Wiring and Connector	F22	Solenoid Valve Short Circuit	Check Solenoid valve Wiring and Connector
F25 Brush Motor (Right) Open Circuit F40 Wheel Paluse Sensor Fault F43 Emergency Stop Release Emergency Stop button F49 Main Controller Fault F50 Main Controller Fault F51 Detergent Pump Short Circuit F52 Scrub Head Actuator Open Circuit F53 Squeegee Actuator Open Circuit F54 Check Squeegee actuator Wiring and Connector F55 Squeegee Actuator Open Circuit F56 Squeegee Actuator Open Circuit F57 Flashing Light Short Circuit F58 Flashing Light Open Circuit F59 Main Relay (#1) Open Circuit F60 Main Relay (#2) Short Circuit F61 Main Relay (#2) Open Circuit F62 Main Relay (#2) Open Circuit F63 Drive Motor Short Circuit F64 Drive Motor Short Circuit F65 Drive Motor Short Circuit F66 Brush Motor (Right) Short Circuit F67 Brush Motor (Right) Short Circuit F68 Brush Motor (Right) Short Circuit F69 Vacuum Motor Short Circuit Check Scrub head Actuator Wiring and Connector F69 Vacuum Motor Short Circuit Check Brush Motor Wiring and Connector F69 Scrub Head Actuator Short Circuit Check Brush Motor Wiring and Connector F69 Scrub Head Actuator Short Circuit Check Scrub head actuator Wiring and Connector F69 Vacuum Motor Short Circuit Check Scrub head actuator Wiring and Connector F69 Scrub Head Actuator Short Circuit Check Scrub head actuator Wiring and Connector	F23	Solenoid Valve Open Circuit	Check Solenoid valve Wiring and Connector
F40 Wheel Paluse Sensor Fault F43 Emergency Stop Release Emergency stop button F49 Main Controller Fault Replace Main controller F50 Main Controller Fault Replace Main controller F53 Detergent Pump Short Circuit Check Detergent pump Wiring and Connector F54 Detergent Pump Open Circuit Check Scrub head actuator Wiring and Connector F55 Scrub Head Actuator Open Circuit Check Squeegee actuator Wiring and Connector F56 Squeegee Actuator Open Circuit Check Flashing light Wiring and Connector F57 Flashing Light Short Circuit Check Flashing light Wiring and Connector F58 Flashing Light Open Circuit Check Main Relay (#1) Wiring and Connector F61 Main Relay (#1) Short Circuit Check Main Relay (#1) Wiring and Connector F62 Main Relay (#2) Short Circuit Check Main Relay (#2) Wiring and Connector F63 Main Relay (#2) Open Circuit Check Main Relay (#2) Wiring and Connector F64 Main Relay (#2) Open Circuit Check Main Relay (#2) Wiring and Connector F65 Drive Motor Short Circuit Check Drive Motor Wiring and Connector F66 Brush Motor (Left) Short Circuit Check Brush Motor (Left) Wiring and Connector F68 Brush Motor (Right) Short Circuit Check Vacuum Motor Wiring and Connector F69 Vacuum Motor Short Circuit Check Scrub head actuator Wiring and Connector	F24	Drive Motor Open Circuit	Check Drive motor wiring and Connector
F43 Emergency Stop Release Emergency stop button F49 Main Controller Fault Replace Main controller F50 Main Controller Fault Replace Main controller F51 Detergent Pump Short Circuit Check Detergent pump Wiring and Connector F52 Detergent Pump Open Circuit Check Scrub head actuator Wiring and Connector F53 Scrub Head Actuator Open Circuit Check Scrub head actuator Wiring and Connector F54 Squeegee Actuator Open Circuit Check Squeegee actuator Wiring and Connector F55 Scrub Head Actuator Open Circuit Check Flashing light Wiring and Connector F56 Flashing Light Short Circuit Check Flashing light Wiring and Connector F57 Flashing Light Open Circuit Check Flashing light Wiring and Connector F58 Flashing Light Open Circuit Check Main Relay (#1) Wiring and Connector F61 Main Relay (#1) Open Circuit Check Main Relay (#1) Wiring and Connector F62 Main Relay (#2) Short Circuit Check Main Relay (#2) Wiring and Connector F63 Main Relay (#2) Open Circuit Check Main Relay (#2) Wiring and Connector F64 Main Relay (#2) Open Circuit Check Main Relay (#2) Wiring and Connector F65 Drive Motor Short Circuit Check Drive Motor Wiring and Connector F66 Brush Motor (Left) Short Circuit Check Brush Motor (Left) Wiring and Connector F67 Brush Motor (Right) Short Circuit Check Brush Motor (Right) Wiring and Connector F69 Vacuum Motor Short Circuit Check Scrub head actuator Wiring and Connector	F25	Brush Motor (Right) Open Circuit	Check Brush Motor (Right) Wiring and Connector
F49 Main Controller Fault F50 Main Controller Fault F53 Detergent Pump Short Circuit F54 Detergent Pump Open Circuit F55 Scrub Head Actuator Open Circuit F56 Squeegee Actuator Open Circuit F57 Flashing Light Short Circuit F58 Flashing Light Open Circuit F59 Check Flashing light Wiring and Connector F59 Flashing Light Open Circuit F50 Main Relay (#1) Short Circuit F50 Main Relay (#1) Open Circuit F51 Check Main Relay (#1) Wiring and Connector F52 Flashing Light Open Circuit F53 Flashing Light Open Circuit F54 Check Flashing light Wiring and Connector F55 Flashing Light Open Circuit F56 Check Flashing light Wiring and Connector F57 Flashing Light Open Circuit F58 Flashing Light Open Circuit F59 Check Main Relay (#1) Wiring and Connector F50 Main Relay (#1) Open Circuit F50 Check Main Relay (#2) Wiring and Connector F51 Check Brush Motor (Left) Wiring and Connector F51 Check Brush Motor (Right) Wiring and Connector F52 Check Brush Motor (Right) Wiring and Connector F53 Check Brush Motor (Right) Wiring and Connector F54 Check Brush Motor (Right) Wiring and Connector F55 Check Brush Motor (Right) Wiring and Connector F56 Check Brush Motor (Right) Wiring and Connector F57 Check Scrub Head Actuator Wiring and Connector	F40	Wheel Paluse Sensor Fault	Check Proximity switch
F50 Main Controller Fault F53 Detergent Pump Short Circuit F54 Detergent Pump Open Circuit F55 Scrub Head Actuator Open Circuit F56 Squeegee Actuator Open Circuit F57 Flashing Light Short Circuit F58 Flashing Light Open Circuit F59 Main Relay (#1) Short Circuit F50 Main Relay (#1) Open Circuit F51 Main Relay (#1) Open Circuit F52 Main Relay (#2) Open Circuit F53 Flashing Light Open Circuit F54 Check Flashing light Wiring and Connector F55 Flashing Light Open Circuit F56 Flashing Light Open Circuit F57 Check Flashing light Wiring and Connector F58 Flashing Light Open Circuit F59 Check Main Relay (#1) Wiring and Connector F60 Main Relay (#1) Open Circuit F61 Check Main Relay (#1) Wiring and Connector F62 Main Relay (#2) Short Circuit F63 Check Main Relay (#2) Wiring and Connector F64 Main Relay (#2) Open Circuit F65 Drive Motor Short Circuit F66 Drive Motor Short Circuit F67 Brush Motor (Left) Short Circuit F68 Brush Motor (Right) Short Circuit F69 Vacuum Motor Short Circuit F69 Vacuum Motor Short Circuit F60 Check Scrub head actuator Wiring and Connector F67 Scrub Head Actuator Short Circuit F68 Check Scrub head actuator Wiring and Connector	F43	Emergency Stop	Release Emergency stop button
Detergent Pump Short Circuit Check Detergent pump Wiring and Connector Check Detergent pump Wiring and Connector Check Detergent pump Wiring and Connector Check Scrub Head Actuator Open Circuit Check Scrub head actuator Wiring and Connector Check Squeegee actuator Wiring and Connector Check Squeegee actuator Wiring and Connector Check Squeegee actuator Wiring and Connector Check Flashing Light Wiring and Connector Check Flashing Light Wiring and Connector Check Flashing Light Wiring and Connector Check Main Relay (#1) Wiring and Connector Check Main Relay (#1) Wiring and Connector Check Main Relay (#1) Wiring and Connector Check Main Relay (#2) Wiring and Connector Check Drive Motor Wiring and Connector Check Brush Motor (Left) Short Circuit Check Brush Motor (Left) Wiring and Connector Check Brush Motor (Right) Wiring and Connector Check Scrub Head Actuator Wiring and Connector	F49	Main Controller Fault	Replace Main controller
F54 Detergent Pump Open Circuit Check Detergent pump Wiring and Connector F55 Scrub Head Actuator Open Circuit Check Scrub head actuator Wiring and Connector F56 Squeegee Actuator Open Circuit Check Squeegee actuator Wiring and Connector F57 Flashing Light Short Circuit Check Flashing light Wiring and Connector F58 Flashing Light Open Circuit Check Flashing light Wiring and Connector F61 Main Relay (#1) Short Circuit Check Main Relay (#1) Wiring and Connector F62 Main Relay (#1) Open Circuit Check Main Relay (#1) Wiring and Connector F63 Main Relay (#2) Short Circuit Check Main Relay (#2) Wiring and Connector F64 Main Relay (#2) Open Circuit Check Main Relay (#2) Wiring and Connector F65 Drive Motor Short Circuit Check Drive Motor Wiring and Connector F67 Brush Motor (Left) Short Circuit Check Brush Motor (Left) Wiring and Connector F68 Brush Motor (Right) Short Circuit Check Brush Motor (Right) Wiring and Connector F69 Vacuum Motor Short Circuit Check Vacuum Motor Wiring and Connector F70 Scrub Head Actuator Short Circuit Check Scrub head actuator Wiring and Connector	F50	Main Controller Fault	Replace Main controller
F55 Scrub Head Actuator Open Circuit Check Scrub head actuator Wiring and Connector F56 Squeegee Actuator Open Circuit Check Squeegee actuator Wiring and Connector F57 Flashing Light Short Circuit Check Flashing light Wiring and Connector F58 Flashing Light Open Circuit Check Flashing light Wiring and Connector F61 Main Relay (#1) Short Circuit Check Main Relay (#1) Wiring and Connector F62 Main Relay (#1) Open Circuit Check Main Relay (#1) Wiring and Connector F63 Main Relay (#2) Short Circuit Check Main Relay (#2) Wiring and Connector F64 Main Relay (#2) Open Circuit Check Main Relay (#2) Wiring and Connector F65 Drive Motor Short Circuit Check Drive Motor Wiring and Connector F67 Brush Motor (Left) Short Circuit Check Brush Motor (Left) Wiring and Connector F68 Brush Motor (Right) Short Circuit Check Brush Motor (Right) Wiring and Connector F69 Vacuum Motor Short Circuit Check Vacuum Motor Wiring and Connector F70 Scrub Head Actuator Short Circuit Check Scrub head actuator Wiring and Connector	F53	Detergent Pump Short Circuit	Check Detergent pump Wiring and Connector
F56 Squeegee Actuator Open Circuit Check Squeegee actuator Wiring and Connector F57 Flashing Light Short Circuit Check Flashing light Wiring and Connector F58 Flashing Light Open Circuit Check Flashing light Wiring and Connector F61 Main Relay (#1) Short Circuit Check Main Relay (#1) Wiring and Connector F62 Main Relay (#1) Open Circuit Check Main Relay (#1) Wiring and Connector F63 Main Relay (#2) Short Circuit Check Main Relay (#2) Wiring and Connector F64 Main Relay (#2) Open Circuit Check Main Relay (#2) Wiring and Connector F65 Drive Motor Short Circuit Check Drive Motor Wiring and Connector F67 Brush Motor (Left) Short Circuit Check Brush Motor (Left) Wiring and Connector F68 Brush Motor (Right) Short Circuit Check Brush Motor (Right) Wiring and Connector F69 Vacuum Motor Short Circuit Check Vacuum Motor Wiring and Connector F70 Scrub Head Actuator Short Circuit Check Scrub head actuator Wiring and Connector	F54	Detergent Pump Open Circuit	Check Detergent pump Wiring and Connector
F57 Flashing Light Short Circuit Check Flashing light Wiring and Connector F58 Flashing Light Open Circuit Check Flashing light Wiring and Connector F61 Main Relay (#1) Short Circuit Check Main Relay (#1) Wiring and Connector F62 Main Relay (#1) Open Circuit Check Main Relay (#1) Wiring and Connector F63 Main Relay (#2) Short Circuit Check Main Relay (#2) Wiring and Connector F64 Main Relay (#2) Open Circuit Check Main Relay (#2) Wiring and Connector F65 Drive Motor Short Circuit Check Drive Motor Wiring and Connector F67 Brush Motor (Left) Short Circuit Check Brush Motor (Left) Wiring and Connector F68 Brush Motor (Right) Short Circuit Check Brush Motor (Right) Wiring and Connector F69 Vacuum Motor Short Circuit Check Vacuum Motor Wiring and Connector F70 Scrub Head Actuator Short Circuit Check Scrub head actuator Wiring and Connector	F55	Scrub Head Actuator Open Circuit	Check Scrub head actuator Wiring and Connector
F58 Flashing Light Open Circuit Check Flashing light Wiring and Connector F61 Main Relay (#1) Short Circuit Check Main Relay (#1) Wiring and Connector F62 Main Relay (#1) Open Circuit Check Main Relay (#1) Wiring and Connector F63 Main Relay (#2) Short Circuit Check Main Relay (#2) Wiring and Connector F64 Main Relay (#2) Open Circuit Check Main Relay (#2) Wiring and Connector F65 Drive Motor Short Circuit Check Drive Motor Wiring and Connector F67 Brush Motor (Left) Short Circuit Check Brush Motor (Left) Wiring and Connector F68 Brush Motor (Right) Short Circuit Check Brush Motor (Right) Wiring and Connector F69 Vacuum Motor Short Circuit Check Vacuum Motor Wiring and Connector F70 Scrub Head Actuator Short Circuit Check Scrub head actuator Wiring and Connector	F56	Squeegee Actuator Open Circuit	Check Squeegee actuator Wiring and Connector
F61 Main Relay (#1) Short Circuit Check Main Relay (#1) Wiring and Connector F62 Main Relay (#1) Open Circuit Check Main Relay (#1) Wiring and Connector F63 Main Relay (#2) Short Circuit Check Main Relay (#2) Wiring and Connector F64 Main Relay (#2) Open Circuit Check Main Relay (#2) Wiring and Connector F65 Drive Motor Short Circuit Check Drive Motor Wiring and Connector F67 Brush Motor (Left) Short Circuit Check Brush Motor (Left) Wiring and Connector F68 Brush Motor (Right) Short Circuit Check Brush Motor (Right) Wiring and Connector F69 Vacuum Motor Short Circuit Check Vacuum Motor Wiring and Connector F70 Scrub Head Actuator Short Circuit Check Scrub head actuator Wiring and Connector	F57	Flashing Light Short Circuit	Check Flashing light Wiring and Connector
F62 Main Relay (#1) Open Circuit Check Main Relay (#1) Wiring and Connector F63 Main Relay (#2) Short Circuit Check Main Relay (#2) Wiring and Connector F64 Main Relay (#2) Open Circuit Check Main Relay (#2) Wiring and Connector F65 Drive Motor Short Circuit Check Drive Motor Wiring and Connector F67 Brush Motor (Left) Short Circuit Check Brush Motor (Left) Wiring and Connector F68 Brush Motor (Right) Short Circuit Check Brush Motor (Right) Wiring and Connector F69 Vacuum Motor Short Circuit Check Vacuum Motor Wiring and Connector F70 Scrub Head Actuator Short Circuit Check Scrub head actuator Wiring and Connector	F58	Flashing Light Open Circuit	Check Flashing light Wiring and Connector
F63 Main Relay (#2) Short Circuit Check Main Relay (#2) Wiring and Connector F64 Main Relay (#2) Open Circuit Check Main Relay (#2) Wiring and Connector F65 Drive Motor Short Circuit Check Drive Motor Wiring and Connector F67 Brush Motor (Left) Short Circuit Check Brush Motor (Left) Wiring and Connector F68 Brush Motor (Right) Short Circuit Check Brush Motor (Right) Wiring and Connector F69 Vacuum Motor Short Circuit Check Vacuum Motor Wiring and Connector F70 Scrub Head Actuator Short Circuit Check Scrub head actuator Wiring and Connector	F61	Main Relay (#1) Short Circuit	Check Main Relay (#1) Wiring and Connector
F64 Main Relay (#2) Open Circuit Check Main Relay (#2) Wiring and Connector F65 Drive Motor Short Circuit Check Drive Motor Wiring and Connector F67 Brush Motor (Left) Short Circuit Check Brush Motor (Left) Wiring and Connector F68 Brush Motor (Right) Short Circuit Check Brush Motor (Right) Wiring and Connector F69 Vacuum Motor Short Circuit Check Vacuum Motor Wiring and Connector F70 Scrub Head Actuator Short Circuit Check Scrub head actuator Wiring and Connector	F62	Main Relay (#1) Open Circuit	Check Main Relay (#1) Wiring and Connector
F65 Drive Motor Short Circuit Check Drive Motor Wiring and Connector F67 Brush Motor (Left) Short Circuit Check Brush Motor (Left) Wiring and Connector F68 Brush Motor (Right) Short Circuit Check Brush Motor (Right) Wiring and Connector F69 Vacuum Motor Short Circuit Check Vacuum Motor Wiring and Connector F70 Scrub Head Actuator Short Circuit Check Scrub head actuator Wiring and Connector	F63	Main Relay (#2) Short Circuit	Check Main Relay (#2) Wiring and Connector
F67 Brush Motor (Left) Short Circuit Check Brush Motor (Left) Wiring and Connector F68 Brush Motor (Right) Short Circuit Check Brush Motor (Right) Wiring and Connector F69 Vacuum Motor Short Circuit Check Vacuum Motor Wiring and Connector F70 Scrub Head Actuator Short Circuit Check Scrub head actuator Wiring and Connector	F64	Main Relay (#2) Open Circuit	Check Main Relay (#2) Wiring and Connector
F68 Brush Motor (Right) Short Circuit Check Brush Motor (Right) Wiring and Connector F69 Vacuum Motor Short Circuit Check Vacuum Motor Wiring and Connector F70 Scrub Head Actuator Short Circuit Check Scrub head actuator Wiring and Connector	F65	Drive Motor Short Circuit	Check Drive Motor Wiring and Connector
F69 Vacuum Motor Short Circuit Check Vacuum Motor Wiring and Connector F70 Scrub Head Actuator Short Circuit Check Scrub head actuator Wiring and Connector	F67	Brush Motor (Left) Short Circuit	Check Brush Motor (Left) Wiring and Connector
F70 Scrub Head Actuator Short Circuit Check Scrub head actuator Wiring and Connector	F68	Brush Motor (Right) Short Circuit	Check Brush Motor (Right) Wiring and Connector
	F69	Vacuum Motor Short Circuit	Check Vacuum Motor Wiring and Connector
F71 Squeegee Actuator Short Circuit Check Squeegee actuator Wiring and Connector	F70	Scrub Head Actuator Short Circuit	Check Scrub head actuator Wiring and Connector
	F71	Squeegee Actuator Short Circuit	Check Squeegee actuator Wiring and Connector

TECHNICAL SPECIFICATIONS

MODEL	RS26L+	RS32L+
LENGTH	63.4 in / 1	1,610 mm
WIDTH (MACHINE WITH SCRUB HEAD)	33 in / 838 mm	36.5 in / 927 mm
HEIGHT	56.7 in / 1	1,440 mm
WEIGHT	618 lbs / 280 Kg	640 lbs / 290 Kg
WEIGHT WITH BATTERIES	880 lbs / 400 Kg	900 lbs / 410 Kg
RECOVERY TANK CAPACITY	27.7 Ga	I / 105 L
SOLUTION TANK CAPACITY	28.5 Ga	I / 108 L
SQUEEGEE WIDTH	33.8 in / 860 mm	40 in / 1,030 mm
CLEANING PATH WIDTH	26 in / 650 mm	32 in / 810 mm
PRODUCTIVITY RATE PER HOUR (IN THEORY)	46, 300 ft ² 4,300 m ²	55, 600 ft ² 5,200 m ²
TRAVEL SPEED (TRANSPORT)	4 Mil 6.5 k	le / h (m / h
MINIMUM AISLE TURN	71 in / 1,800 mm	75 in / 1,900 mm
PAD/BRUSH PRESSURE		/ 35 Kg / 55 Kg / 75 Kg
SOLUTION FLOW	0 ~ 0.7 (0 ~ 2.7	
BATTERIES	Lithium-ion ba	tteries, 240AH
VOLTAGE	24V	DC
DRIVE WHEEL	1.1 hp /	0.8 KW
BRUSH MOTOR	(2) 0.6 hp / 0.4	5 KW, 210 RPM
VACUUM MOTOR	0.6 hp /	0.45KW
VACUUM WATER LIFT (MAX)	70 in. H2O / 1	780 mm. H2O
RUN TIME PER CHARGE	3~3.5	Hours
DECIBEL RATING AT OPERATOR'S EAR, INDOORS	68 dB(A)	
GRADE LEVEL, MAX	Scrubbing: 4°/7% Trans	sporting (empty):10°/17.5%
·		

13


MAIN FRAME GROUP

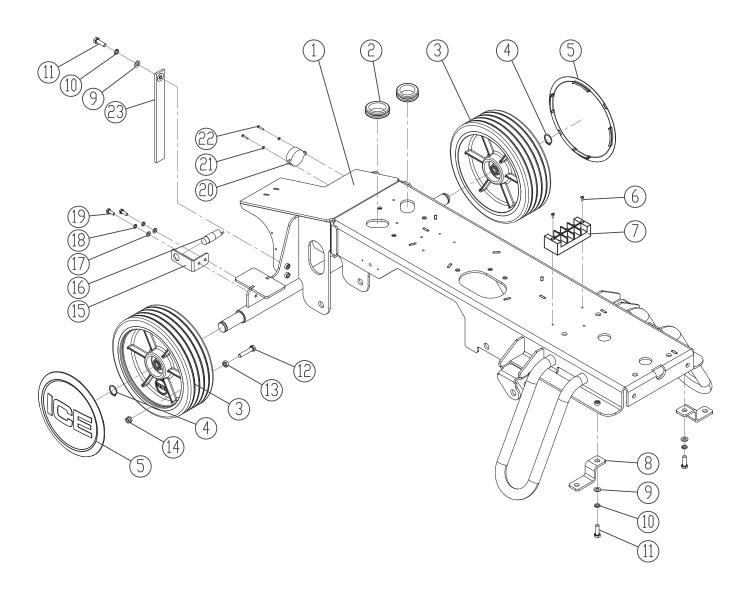

MAIN FRAME GROUP

DIA NO.	PART NUMBER	DESCRIPTION	NO REQ'D
1	8320150	MAIN FRAME, WELDED	1
2	8310133	RUBBER GROMMET	4
	8310119	10" WHEEL, PU TIRE	2
3	1612605	BALL BEARING,6205-2RS	4
	8315250	10" WHEEL, ANTI-SLIP, OPTION	2
4	1436025	RETAINING RING, 25MM	2
5	8310150	WHEEL CAP	2
6	1221412	SCREW, PAN HEAD, M4×12	2
7	1883207	BARRIER TERMINAL BLOCK	1
8	8310120	BRACKET, STAND	2
9	1421824	FLAT WASHER, M8×∮24×2.0	3
10	1422821	LOCK WASHER M8	3
11	1021825	BOLT, HEX, M8×25	3
12	1021840	BOLT, HEX, M8×40	1
13	1121807	HEX NUT,M8	1
14	1123810	LOCK NUT M8	1
15	8310158	BRACKET,PROXIMITY SENSOR	1
16	8134709A	PROXIMITY SENSOR,KIT	1
17	1421618	FLAT WASHER, M6×∮18×1.6	2
18	1422616	LOCK WASHER M6	2
19	1021616	BOLT, HEX, M6×16	2
20	8310708A	HORN, 24VDC, KIT	1
21	1421307	FLAT WASHER, M3×∮7×0.5	4
22	1221312	SCREW, PAN HEAD, M3×12	2
23	8210118	STATIC STRAP	1

STEERING & DRIVE WHEEL GROUP

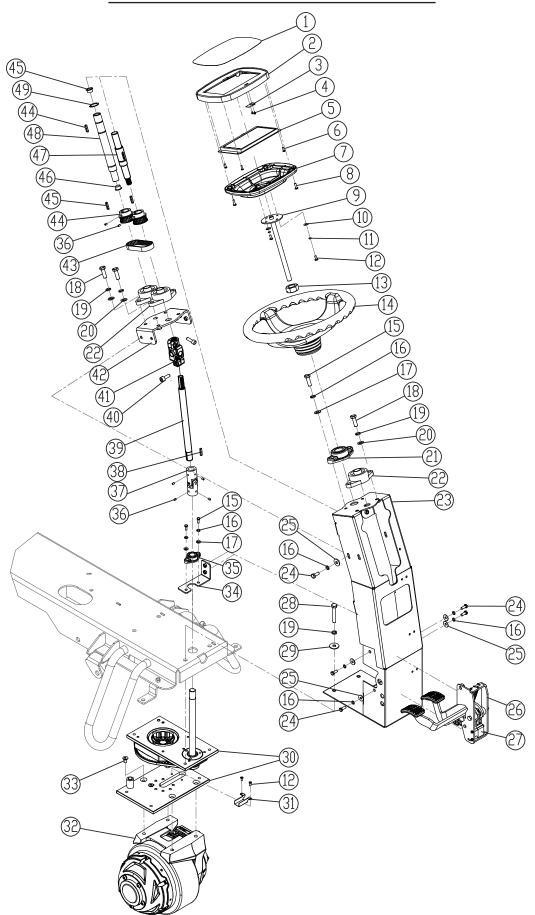


STEERING & DRIVE WHEEL GROUP

DIA NO.	PART NUMBER	DESCRIPTION	NO REQ'D
1	8313704	DECAL, TOUCH SCREEN PANEL	1
2	8313703	COVER, TOUCH SCREEN	1
3	8313723	FPC CONNECTOR	1
4	1311006	SELF-TAPPING CREW, ST3.0×6.0	2
5	8313712B	TOUCH SCREEN, ENGLISH UI	1
6	1221306	SCREW, M3×6	4
7	8313702	BASE, TOUCH SCREEN	1
8	1221516	SCREW, M5×16	4
9	8313701	TUBE WITH FLANGE	1
10	1421515	FLAT WASHER, M5×∮15×1.0	4
11	1422513	LOCK WASHER, M5	4
12	1221512	SCREW, PAN HEAD, M5×12	6
13	8313612	HEX NUT, M24	1
14	8313610	STEERING WHEEL	1
15	1021830	BOLT, HEX HEAD,M8×30	4
16	1422821	LOCK WASHER, M8	12
17	1421816	FLAT WASHER, M8×∮16×1.6	4
18	1021035	BOLT, HEX HEAD,M10×35	6
19	1422026	LOCK WASHER, M10	10
20	1421020	FLAT WASHER, M10×∮20×2	6
21	8313609	FLANGE BEARING, PLASTIC	1
22	8313608	FLANGE BAEARING	3
23	8313601	STEERING SUPPORT	1
24	1021820	BOLT, HEX HEAD,M8×20	8
25	1421824	FLAT WASHER, M8x∮24×2.0	8
26	8310640	ACCELERATOR & BRAKE ASSEMBLY	1
27	8310431	HALL SENSOR WITH CABLE	1
28	1021050	BOLT, HEX HEAD,M10×50	4
29	1421030	FLAT WASHER, M10×∮30×2.5	4
30	8320685	STEER-CONTROL ASSEMBLY	1

STEERING & DRIVE WHEEL GROUP

DIA NO.	PART NUMBER	DESCRIPTION	NO REQ'D
31	8310687	BRACKET, WIRING	1
32	8310680	DRIVE WHEEL, 24VDC	1
33	1513020	SCREW, HEX SOCKET, M10×20	4
34	8310645	BRACKET, FLANGE BEARING	1
35	8310609	BEARING, FLANGE	1
36	1534508	SET SCREW, M5 ×8	8
37	8310604	U-JOINT	1
38	1654025	KEY, 4.75×4.75×25.4	2
39	8313621	SHAFT, STEERING	1
40	1531830	HEX SOCKET CAPHEAD SCREW, M8×30	2
41	8313620	U-JOINT	1
42	8313602	BRACKET, FLANGLE BEARING	1
43	8313607	BELT	1
44	8313606	PULLEY	2
45	1655025	KEY, 5×5×25	3
46	8313611	BUSHING	2
47	8313622	SHAFT, PULLEY	1
48	8313605	SHAFT, PULLEY	1
49	1436025	RETAINING RING, 25MM	3


SOLUTION TANK GROUP

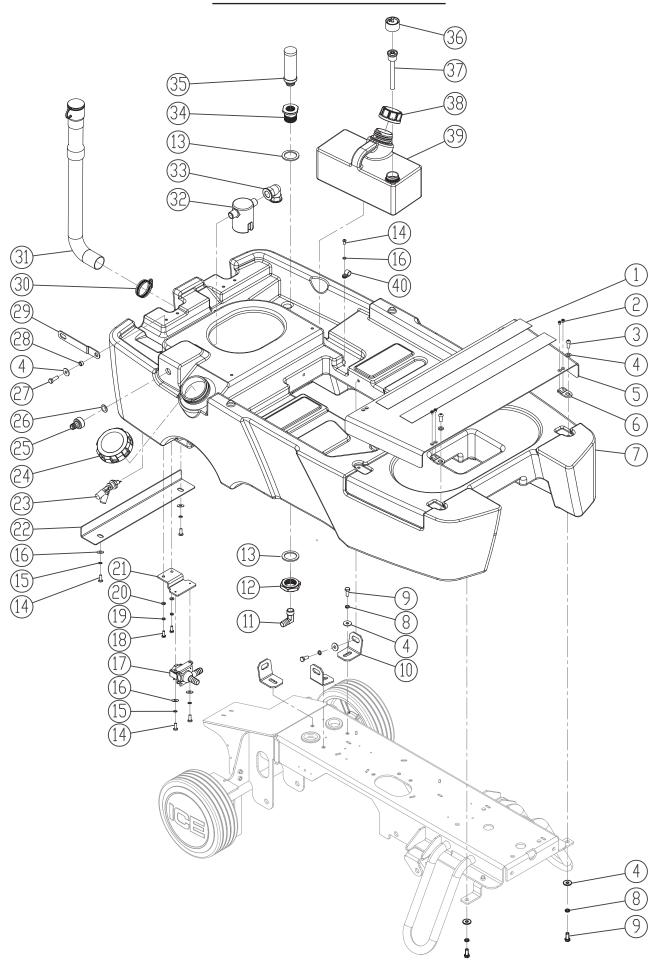

SOLUTION TANK GROUP

DIA NO.	PART NUMBER	DESCRIPTION	NO REQ'D
1	8310132	NON-SLIT MAT	2
2	1222508	SCREW, M5×8	8
3	1512820	SCREW, HEX SOCKET M8×20	4
4	1421824	FLAT WASHER, M8×∮24×2.0	13
5	8320102	FOOTREST PLATE	1
6	8310140	JUNCTION PLATE	4
7	8320101	SOLUTION TANK	1
8	1422821	SPRING LOCK WASHER, M8	8
9	1021820	BOLT, HEX HEAD, M8×20	8
10	8310130	BRACKET, SOLUTION TANK MNTG	3
11	8310124	ELBOW, G1/2	1
12	8310142	NUT, M36	1
13	8310141	SEALING	2
14	1221512	SCREW, PAN HEAD, M5×12	9
15	1422513	LOCK WASHER, M5	4
16	1421510	FLAT WASHER, M5×∮10×1.0	9
17	8311310C	SOLENOID VALVE	1
18	1021616	BOLT, HEX HEAD, M6×16	2
19	1422616	LOCK WASHER M6	2
20	1421612	FLAT WASHER, M6×∮12×1.6	2
21	8320105	BRACKET	1
22	8320128	BRACKET, PROTECTIVE	1
23	8310238A	SENSOR, SOLUTION LEVEL, KIT	1
24	8310125	CAP, SOLUTION TANK	1
25	8320123	QUICK CONNECTOR G1/2	1
26	8320127	GASKET	1
27	1021825	BOLT, HEX HEAD, M8×25	1
28	8310225	SLEEVE, ∮8.1×∮12.7×7.8	1
29	8320104	ARM, RECOVERY TANK SUPPORT	1
30	1962050	CLAMP, 2 INCH	1
31	8011040	DRAIN HOSE	1
32	8320121	FLOAT VALVE	1
33	8320122	ELBOW, G1/2	1
34	8310123	ADAPTER, STRAINER ASSEMBLY	1
35	8310122	STRAINER	1
36	8310463	CAP ADAPTER	1
37	8310464	INSERT TUBE	1
38	8310462	CAP, BOTTLE	1
39	8320901	DETERGENT TANK	1
40	8113009	CLAMP, NYLON	5


RECOVERY TANK GROUP

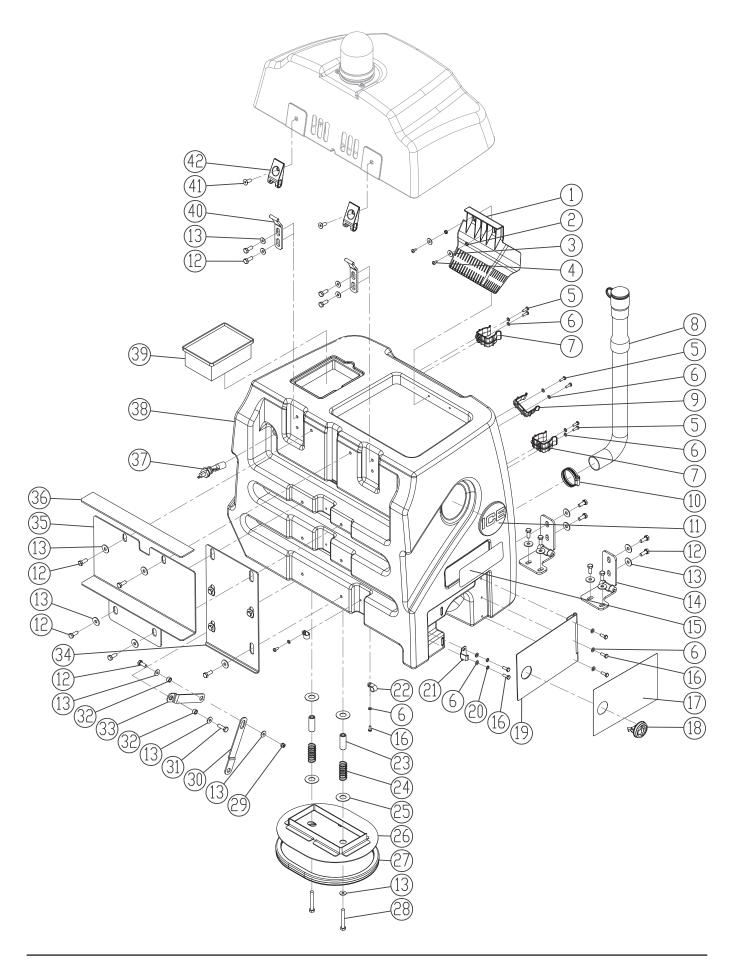

RECOVERY TANK GROUP

DIA NO.	PART NUMBER	DESCRIPTION	NO REQ'D
1	8310250	DEBRIS COLLECTOR	1
2	8012008	BUSHING	2
3	1421618	FLAT WASHER, M6× ∮ 18×1.6	2
4	1321413	SELF-TAPPING, ST4.8 x 13	2
5	1221516	SCREW, PAN HEAD, M5X16	8
6	1421510	FLAT WASHER, M5× ∮ 10×1.0	21
7	6210111	CLAMP, HOSE	2
8	8011040	DRAIN HOSE	1
9	2310129	CLAMP, HOSE	2
10	1962050	CLAMP, 2 INCH	1
11	4010316	ICE LOGO	2
12	1021820	BOLT, HEX HEAD, M8×20	21
13	1421824	FLAT WASHER, M8× ∮ 24×2.0	25
14	8310126	HINGE ASSY.	2
15	8130099	DECAL, I-SYNERYG	2
16	1221512	SCREW, PAN HEAD, M5×12	13
17	8320903	DECAL, DETERGENT INSTRUCTION	1
18	8320211	LOCK WITH HINGE	1
19	8320210	COVER	1
20	1422513	LOCK WASHER, M5	4
21	8320224	HOOK, LOCK	1
22	8113009	CLAMP, NYLON	8
23	8310221	SPACER	2
24	8310220	COMPRESSION SPRING	2
25	8310222	FLAT WASHER, LARGE	4
26	8320220	COVER, SOLUTION TANK	1
27	8320223	SEALING STRIP	1
28	1022860	BOLT, HEX HEAD, M8×60	2
29	1123810	LOCK NUT, M8	1
30	8320104	ARM, RECOVERY TANK SUPPORT	1
31	1021825	BOLT, HEX HEAD,M8×25	1
32	8310225	SLEEVE, ∮ 8.1× ∮ 12.7×7.8	2
33	8320203	ARM, RCOVERY TANK SUPPORT	1
34	8310215	RECOVERY TANK SUPPORT	1
35	8310211	BRACKET, SUPPORT	1
36	8310214	SPACER, RUBBER	1
37	8310238A	SENSOR, SOLUTION LEVEL, KIT	1
38	8320201	RECOVERY TANK	1
39	8310237	FILTER, DUST	1
40	8310227	HINGE, WELDED	2
41	1513820	SCREW, HEX SOCKET, M8×20	2
42	8310226	HINGE, LEAF	2


RECOVERY TANK COVER GROUP

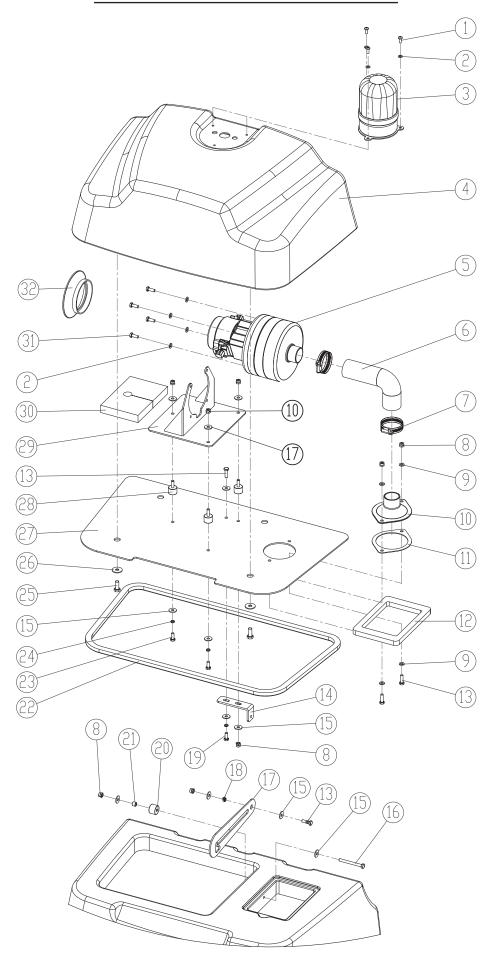

RECOVERY TANK COVER GROUP

DIA NO.	PART NUMBER	DESCRIPTION	NO REQ'D
1	1221512	SCREW, PAN HEAD, M5×12	3
2	1421510	FLAT WASHER, M5×∮10×1.0	7
3	8310165A	CAUTION LIGHT, KIT	1
4	8310202	RECOVERY TANK COVER	1
	8310299	VACUUM MOTOR, 3 STAGE, KIT	1
_	8112008	CARBON BRUSH	2
5	8310260	AMETEK VACUUM MOTOR, 3 STAGE, KIT, US MARKET	1
	8132006	CARBON BRUSH FOR AMETEK VACUUM MOTOR	2
6	8310207	VACUUM HOSE	1
7	1962050	CLAMP, 2 INCH	2
8	1123608	LOCK NUT, M6	8
9	1421612	FLAT WASHER, M6×∮12×1.6	4
10	8310204	ADAPTER, VACUUM HOSE	1
11	8310205	GASKET, ADAPTER	1
12	8310230	GASKET, DUST FILTER	1
13	1021620	BOLT, HEX HEAD, M6×20	4
14	8310232	BRACKET	1
15	1421618	FLAT WASHER, M6×∮18×1.6	12
16	1022600	BOLT, HEX HEAD, M6×100	1
17	8310228	SUPPORT, RECOVERY TANK COVER	1
18	8310231	SLEEVE, ∮6.4×∮9.5×4	1
19	1021616	BOLT, HEX HEAD, M6×16	1
20	8310236	SPACER, NYLON	1
21	8310235	SLEEVE, ∮6.4×∮9.5×8	1
22	8310229	SEALING STRIP	1
23	1021610	BOLT, HEX HEAD, M6×10	2
24	1422616	LOCK WASHER, M6	3
25	1021820	BOLT, HEX HEAD, M8×20	4
26	1421824	FLAT WASHER, M8×∮24×2.0	4
27	8310203	PLATE, VACCUM MOTOR MNTG	1
28	8310208	ISOLATER, M6	3
29	8310209	BRACKET, VACCUM MOTOR	1
30	8310234	INSULATION	1
31	1311316	SCREW, SELF-TAPPING, ST4.8×16	4
32	8310206	SEAL, FAN	1

CONTROL PANEL GROUP

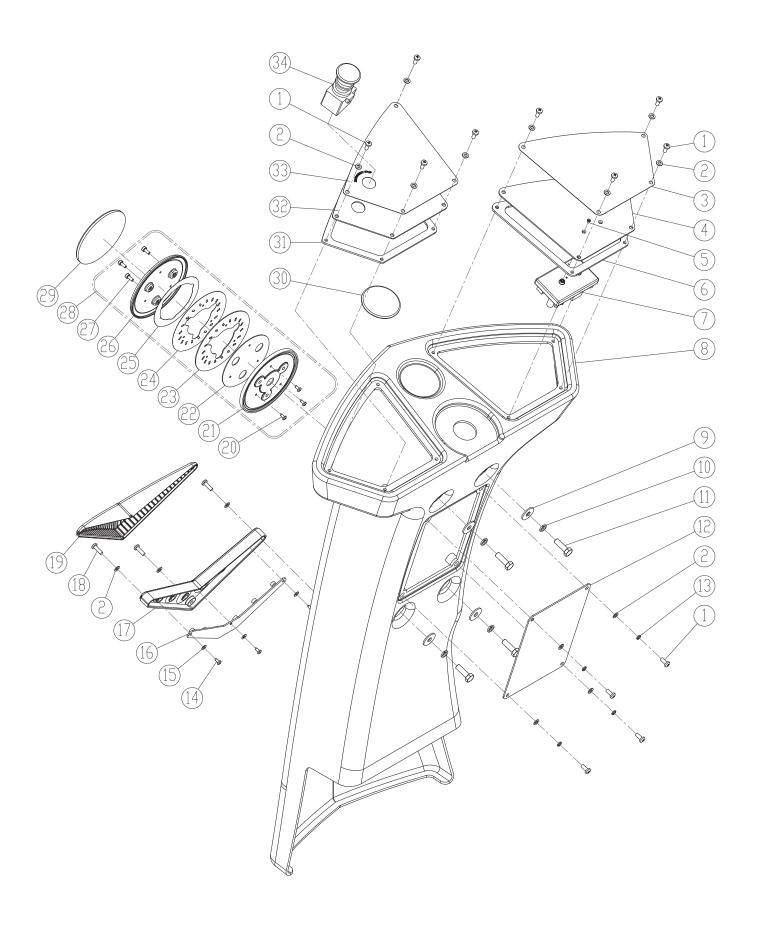


26

CONTROL PANEL GROUP

DIA NO.	PART NUMBER	DESCRIPTION	NO REQ'D
1	1221512	SCREW, PAN HEAD, M5×12	12
2	1421510	FLAT WASHER, M5.3×∮10×1.0	15
3	8313709	DECAL, CONTROL PANEL	1
4	8313706	PLATE, CONTROL PANEL	1
5	1222305	SCREW, COUNTERSUNK HEAD M3×5	2
6	8310712	GASKET, CONTROL PANEL	1
7	8134768	RFID BOARD	1
8	8313730	CONROL HOUSING	1
9	1421824	FLAT WASHER, M8×∮24×2.0	4
10	1422821	LOCK WASHER, M8	4
11	1021825	BOLT, HEX HEAD, M8×25	4
12	8313711	COVER	1
13	1422513	SPRING LOCK WASHER, M5	4
14	1321110	SCREW, SELF-TAPPING, ST3.5×10	3
15	1421409	FLAT WASHER, M4×∮9×0.8	3
16	8133610	LED LIGHT, KIT	1
17	8133601	BASE, LED LIGHT	1
18	1221520	SCREW, PAN HEAD, M5×20	3
19	8133602	COVER, LED LIGHT	1
20	1311006	SELF-TAPPING CREW, ST3.0×6.0	3
21	8230401	BASD, LED LIGHT	1
22	8230403	LED PCB	1
23	8230405	LIGHT GUIDE PLATE	1
24	8230404	REFLECTOR	1
25	8230406	DISPERSE PIECE	1
26	8230402	COVER, LED LIGHT	1
27	1521410	SCREW, SOCKET HEAD, M4×10	3
28	8230400	LED LIGHT KIT	1
29	4010316	ICE LOGO	1
30	2010121	ICE LOGO, SMALL	1
31	8310755	GASKET, SWITCH PANEL	1
32	8313705	PLATE, LEFT SWITCH PANEL	1
33	8313707	DECAL, LEFT CONTROL PANEL	1
34	8310707	EMERGENCY STOP SWITCH	1


MAIN CONTROLLER GROUP

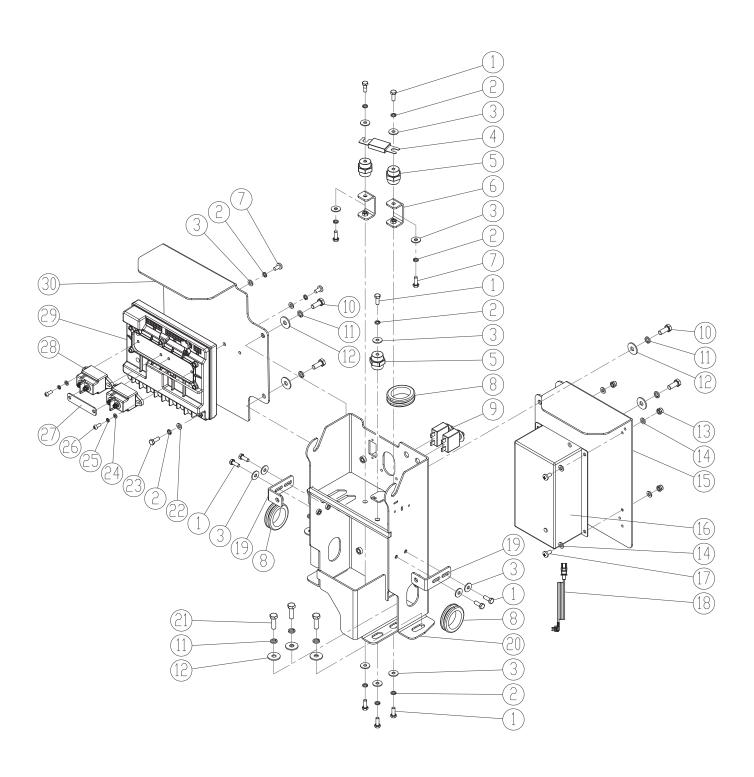

CONTROLLER GROUP

DIA NO.	PART NUMBER	DESCRIPTION	NO REQ'D
1	1021616	SCREW, HEX HEAD, M6×16	10
2	1422616	LOCK WASHER, M6	20
3	1421618	FLAT WASHER, M6×∮18×1.6	14
4	8310480	FUSE, 150A	1
5	8114705	INSULATOR	3
6	8310422	BRACKET, INSULATOR	2
7	1021616	SCREW, HEX HEAD, M6×12	2
8	8310133	RUBBER GROMMET	4
9	8310740	CIRCUIT BREAKER, 5A	2
10	1021820	BOLT, HEX HEAD,M8×20	4
11	1422821	SPRING LOCK WASHER, M8	9
12	1421828	FLAT WASHER, M8×∮28×2.5	9
13	1123507	LOCK NUT, M5	4
14	1421510	FLAT WASHER, M5.3×∮10×1.0	8
15	8320454	BRCKET, CHARGER	1
16	8311720	ON BOARD BATTERY CHARGER, 30A	1
17	1221512	SCREW, PAN HEAD, M5×12	4
	8112030	POWER CORD, BATTERY CHARGER, US	1
	8112040	POWER CORD, BATTERY CHARGER, EU	1
18	8112050	POWER CORD, BATTERY CHARGER, JP	1
	8112060	POWER CORD, BATTERY CHARGER, CH	1
	8112070	POWER CORD, BATTERY CHARGER, UK	1
19	8310425	BRACKET	2
20	8320450	BRACKET, SCRUB HEAD LIFTING	1
21	1021825	BOLT, HEX HEAD, M8×25	5
22	1423612	FLAT WASHER M6×∮12×1	10
23	1023612	HEX BOLT M6 × 12, COPPER	10
24	1421409	FLAT WASHER, M4×∮9×0.8	4
25	1422411	LOCK WASHER, M4	4
26	1221416	SCREW, HEX HEAD, M4×16	4
27	8313421	CONNECT PLATE	1
28	8313420	RELAY, 24VDC 120A	2
29	8313400	MAIN CONTROLLER	1
30	8320453	BRCKET, MAIN CONTROLLER	1

SEAT GROUP

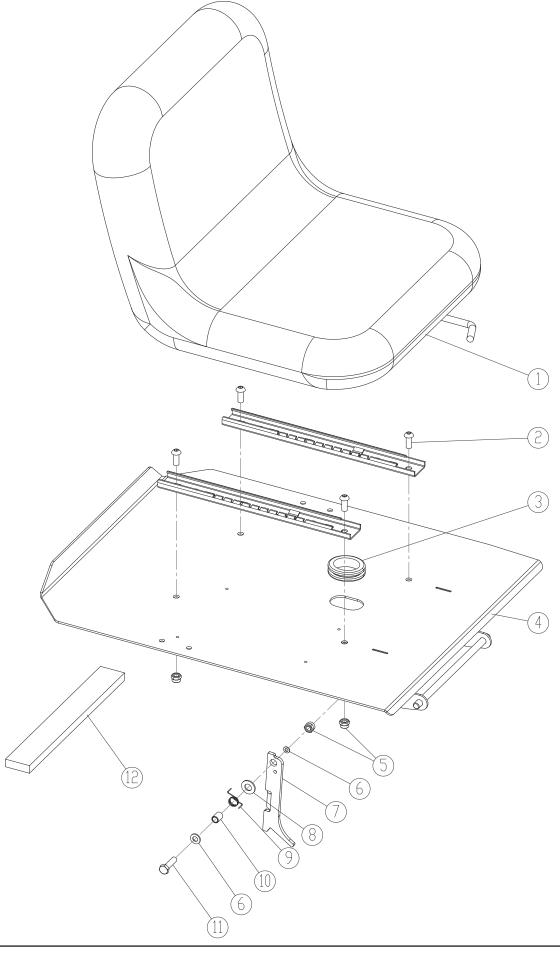


29

SEAT GROUP

DIA NO.	PART NUMBER	DESCRIPTION	NO REQ'D
1	8310402K	SEAT, KIT	1
2	1512820	SCREW, HEX SOCKET, M8×20	4
3	8310133	RUBBER GROMMET	1
4	8310411	PLATE, SEAT MNTG	1
5	1123810	LOCK NUT M8	5
6	1421816	FLAT WASHER, M8×∮16×1.0	2
7	8310413	SUPPORT, SEAT	1
8	8117007	NYLON SPACER	1
9	8310415	TORSION SPRING	1
10	8310414	SLEEVE, ∮8.2×∮11×15	1
11	1031830	BOLT, HEX HEAD, M8×30	1
12	8310460	SPACER	1


BATTERY GROUP

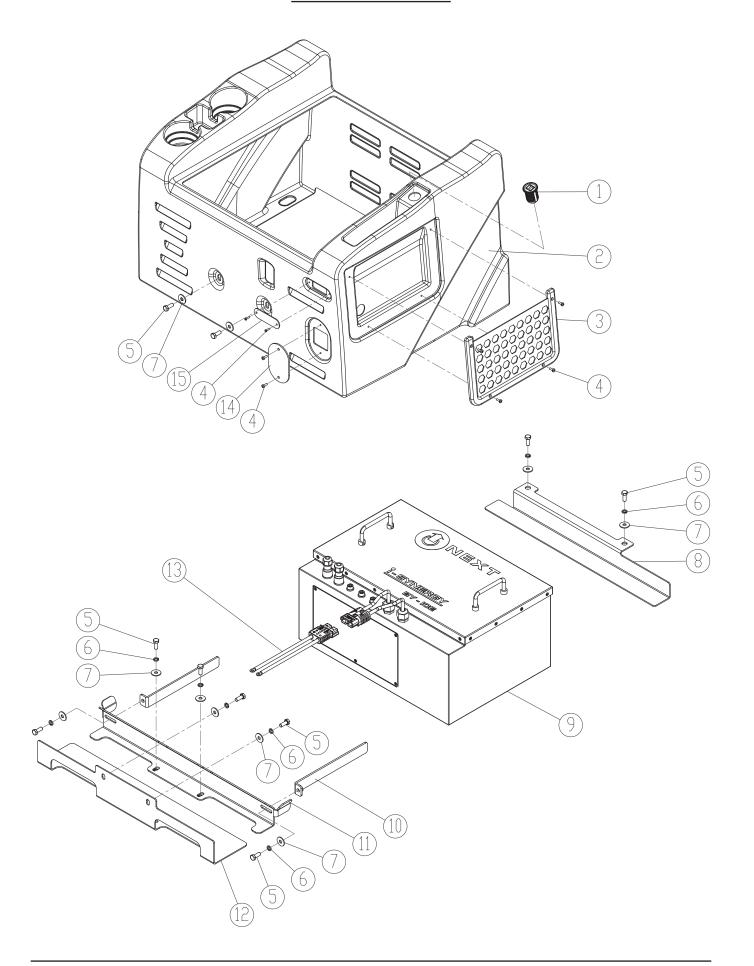

BATTERY GROUP

DIA NO.	PART NUMBER	DESCRIPTION	NO REQ'D
1	8320420	USB CHARGE PORT	1
2	8320401	BOX, BATTERY	1
3	8320411	CARGO MESH	1
4	1221410	SCREW, PAN HEAD, M4×10	8
5	1021820	BOLT, HEX HEAD,M8×20	10
6	1422821	SPRING LOCK WASHER, M8	8
7	1421824	FLAT WASHER, M8×∮24×2.0	10
8	8320103	SUPPORT, BATTERY, REAR	1
9	N240650	LITHIUM-ION BATTERY, 240AH	1
10	8310407	PLATE	2
11	8320452	SUPPORT, BATTERY, FRONT	1
12	8320451	FIXED BOARD, BATTERY	1
13	8311741	BATTERY CONNECT CABLE	1
14	8210114	COVER	1
15	8134061	SCREEN, CHARGER	1


SCRUB HEAD LIFTING GROUP

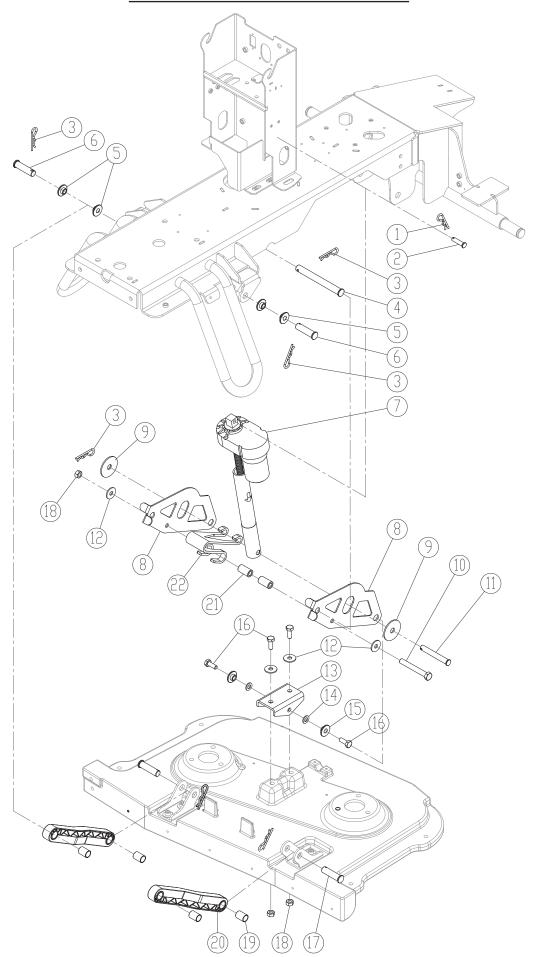

SCRUB HEAD LIFTING GROUP

DIA NO.	PART NUMBER	DESCRIPTION	NO REQ'D
1	8310320	PIN, COTTER	1
2	8210301	PIN, ∮9.5×38	1
3	8210309	PIN, COTTER	6
4	8310311	PIN, ∮16×150	1
5	8320129	BUSHING	4
6	8320130	PIN, ∮16×63	4
7	8310303A	LINEAR ACTUATOR, KIT	1
8	8310305	PLATE, ARM, SCRUB HEAD LIFTING	2
9	8310314	FLAT WASHER, LARGE	2
10	1032090	BOLT, HEX HEAD, M10×90	1
11	8310313	PIN, ∮12×90	1
12	1421030	FLAT WASHER, M10×∮30×2.5	4
13	8310304	BRACKET, SCRUB HEAD LIFTING	1
14	1421020	FLAT WASHER, M10×∮20×2	2
15	8310307	BUSHING, FLANGE	2
16	1011025	BOLT, HEX HEAD, M10×25	4
17	8310312	PIN, ∮16×57	2
18	1123012	LOCK NUT, M10	3
19	8310144	SLEEVE, ∮16×∮18.6×25.4	4
20	8310118	ARM, SCRUB HEAD LIFTING	2
21	8310306	SLEEVE, ∮10.5×∮18.5×34	2
22	8310308	SPRING	1


SCRUB HEAD GROUP

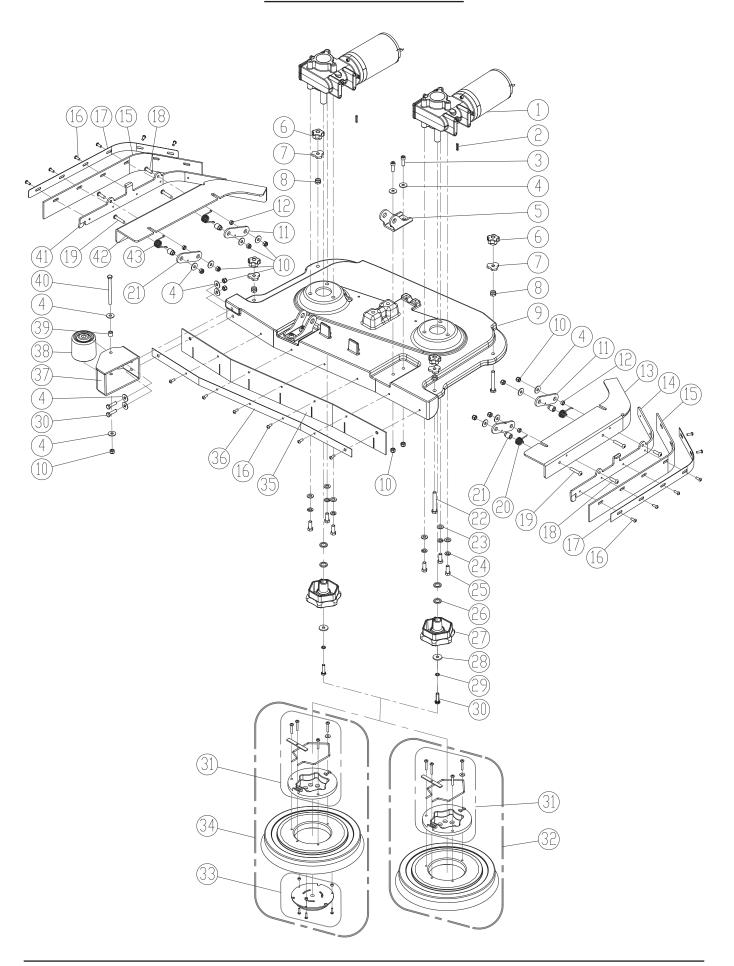

SCRUB HEAD GROUP

DIA	PART		NO
NO.	NUMBER	DESCRIPTION	REQ'D
1	8310399	BRUSH MOTOR, 24VDC 450W, KIT	2
2	1655025	KEY, 5×5×25	2
3	1021825	BOLT, HEX HEAD, M8×25	4
4	1421824	FLAT WASHER, M8×∮24×2.0	18
5	8320307	BRACKET, SCRUB HEAD	2
6	8210532	KNOB, M10	4
7	8340516	KNOB M10	4
8	1113012	LOCK NUT, M10	4
	8321301	SCRUB HEAD HOUSING, RS26L+	1
9	8320301	SCRUB HEAD HOUSING, RS32L+	1
10	1123810	LOCK NUT, M8	15
11	8320355	LEVER	4
12	8320358	SLEEVE	4
13	8320351	LEFT BRACKET	1
14	8320352	BRACKET, LEFT SIDE SKIRT	1
15	8320354	BLADE, SIDE SKIRT, LINATEX	2
16	1514616	SCREW, SOCKET HEAD, M6×16	18
17	8320353	CLAMP, SIDE SKIRT	2
18	1512820	BOLT, SOCKET HEAD, M8×20	4
19	1512840	BOLT, SOCKET HEAD, M8×40	4
20	8320357	TORSION SPRING, LEFT ROTATED	2
21	8320356	SLEEVE	4
22	1021080	BOLT, HEX HEAD, M10X80	4
23	1421020	FLAT WASHER, M10×∮20×2.0	6
24	1422010	LOCK WASHER, 3/8	6
25	1023010	BOLT, HEX HEAD, 3/8-16×1	6
26	8210804	SPACER	4
27	8210805	HUB, BRUSH DRIVER	2
28	1421828	FLAT WASHER, M8×∮28×3.0	2
29	1422821	LOCK WASHER, M8	2
30	1021830	BOLT, HEX HEAD, M8×30	4
31	9000004	CLUCH, G-400S	2
	9050013	BRUSH, 13 INCH, RS26L+	2
32	9050016	BRUSH, 16 INCH, RS32L+	2
33	9000003	CENTER LOCK, #3	2
	9040013	PAD DRIVER, 13 INCH, RS26L+	2
34	9040016	PAD DRIVER, 16 INCH, RS32L+	2
	8321302	FRONT SKIRT, RS26L+	1
35	8320302	FRONT SKIRT, RS32L+	1
	8321303	FRONT SKIRT CLAMP, RS26L+	1
36	8320303	RS32L+ FRONT SKIRT CLAMP	1
37	8320305	BRACKET, BUMPER WHEEL	1
38	8310362	BUMPER WHEEL	1
39	8115404	SLEEVE, ∮8×∮12.7×12.7	6
40	1022800	BOLT, HEX HEAD, M8×100	1
41	8320362	BRACKET, RIGHT SIDE SKIRT	1
	+	RIGHT BRACKET	1
42	8320361	RIGHT BRACKET	!

SQUEEGEE GROUP

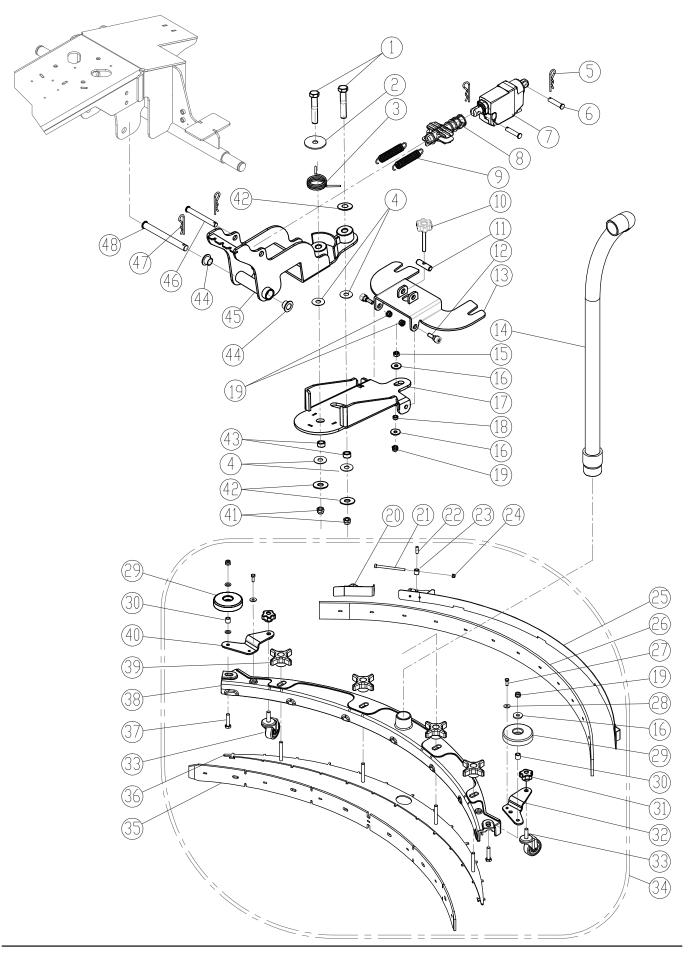


SQUEEGEE GROUP

DIA NO.	PART NUMBER	DESCRIPTION	NO REQ'D
1	1021265	BOLT, HEX HEAD, M12×65	2
2	8310314	FLAT WASHER, M13×∮55×3	1
3	8320503	TORSION SPRING	1
4	8321516	PLASTIC WASHER ∮ 16.2× ∮ 30×1.5	4
5	8310320	PIN, COTTER	2
6	8310506	PIN, ∮10×45	2
7	8320501	LINEAR, ACTUATOR	1
8	8310507	ADAPTER	1
9	8321513	EXTENSION SPRING	2
10	8701002	KNOB M8×70	1
11	8211506	SHAFT	1
12	8211504	SHOULDER BOLT	2
13	8321503	BRACKET, SQUEEGEE INSTALL	1
14	8310270	VACUUM HOSE	1
15	1123807	HEX NUT,M8	1
16	1421824	FLAT WASHER, M8×∮24×2.0	6
17	8321511	BRACKET, SQUEEGEE SWING	1
18	8211508	BUSHING	1
19	1123810	LOCK NUT M8	5
20	8210525	SHORT CLAMP ASSEMBLY	1
21	1221575	SCREW, PAN HEAD, M5×75	1
22	8118624	SHAFT	1
23	8118623	SPACER	1
24	1123507	LOCK NUT, M5	1
0.5	8311514	CLAMP ASSEMBLY, RS26+	1
25	8310514	CLAMP ASSEMBLY, RS32+	1
	8311531	REAR BLADE, LINATEX, RS26+	1
	8310531	REAR BLADE, LINATEX, RS32+	1
26	8311541	REAR BLADE, PU, RS26+, OPTION	1
	8310541	REAR BLADE, PU, RS32+, OPTION	1
27	1021616	BOLT, HEX HEAD, M6×16	2
28	1421612	FLAT WASHER, M6×∮12×1.6	2
29	8116009	PROTECTIVE WHEEL	2
30	8115404	SLEEVE, ∮8×∮12.7×12.7	2

SQUEEGEE GROUP

DIA NO.	PART NUMBER	DESCRIPTION	NO REQ'D
31	8210532	KNOB, M10	2
32	8118200	LEFT BRACKET	1
33	8310550	CASTER, 2 INCH	2
34	8311570	SQUEEGEE ASSEMBLY, RS26+	1
34	8310580	SQUEEGEE ASSEMBLY, RS32+	1
	8311534	FRONT BLADE, LINATEX, RS26+	1
25	8310534	FRONT BLADE, LINATEX, RS32+	1
35	8311544	FRONT BLADE, PU, RS26+, OPTION	1
	8310544	FRONT BLADE, PU, RS32+, OPTION	1
20	8311562	RETAINER, SQUEEGEE, RS26+	1
36	8310562	RETAINER, SQUEEGEE, RS32+	1
37	1021835	BOLT, HEX HEAD, M8×35	2
	8311561	SQUEEGEE HOSING, RS26+	1
38	8310561	SQUEEGEE HOSING, RS32+	1
39	8210518	KNOB, M8	4
40	8118300	RIGHT BRACKET	1
41	1123115	LOCK NUT, M12	2
42	1421132	FLAT WASHER φ 13× φ 32×1.5	3
43	8321514	SLEEVE, φ 12 x φ 16 x 8.5	2
44	8320507	BUSHING	2
45	8321512	BRACKET, SQUEEGEE	1
46	8310508	PIN, ∮12×100	1
47	8210309	PIN, COTTER	2
48	8310311	PIN, ∮16×150	1

SOLUTION & DETERGENT SYSTEM

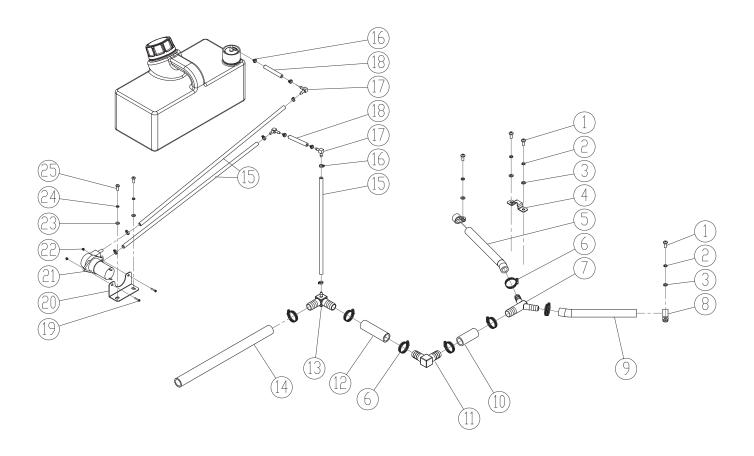


SOLUTION & DETERGENT SYSTEM

DIA NO.	PART NUMBER	DESCRIPTION	NO REQ'D
1	1221512	SCREW, PAN HEAD, M5×12	4
2	1422513	SPRING LOCK WASHER, M5	4
3	1421510	FLAT WASHER, M5.3×∮10×1.0	4
4	8320306	CLAMP	1
5	8310903	TUBING, ID=12MM, L=175MM	1
6	1962025	CLAMP, 16-25MM	8
7	8310374	FITTING, PLASTIC	1
8	8146305	PLASTIC CLAMP	2
9	8310904	TUBING, ID=12MM L=210MM	1
10	8310902	TUBING, ID=16MM L=40MM	1
11	8310376	ELBOW	1
12	8310911	TUBING, ID=16MM L=80MM	1
13	8310375	ELBOW WITH CONNECTOR	1
14	8310901	TUBING, ID=16MM L=500MM	1
15	8310905	TUBING, ID=4MM L=330MM	3
16	1914080	TIE, 3×80MM	10
17	8310467	FITTING	3
18	8310910	TUBING, ID=4MM L=100MM	2
19	1221310	SCREW, PAN HEAD, M3×10	2
20	8320911	BRACKET, PUMP	1
21	8320910K	DETERGENT PUMP, KIT	1
22	1123305	LOCK NUT M3	2
23	1421409	FLAT WASHER, M4×∮9×0.8	2
24	1422411	LOCK WASHER, M4	2
25	1221412	SCREW, PAN HEAD, M4×12	2

WEAR AND TEAR PARTS

DIA NO.	PART NUMBER	DESCRIPTION	NO REQ'D
1	8310119	10" WHEEL, PU TIRE	2
2	8116009	PROTECTIVE WHEEL	2
3	8310362	PROTECTIVE WHEEL	1
4	8311531	REAR BLADE, LINATEX, RS26L+	1
4	8310531	REAR BLADE, LINATEX, RS32L+	1
	8311534	FRONT BLADE, LINATEX, RS26L+	1
5	8310534	FRONT BLADE, LINATEX, RS32L+	1
	9050013	BRUSH, 13 INCH, RS26L+	2
6	9050016	BRUSH, 16 INCH, RS32L+	2
7	9040013	PAD DRIVER, 13 INCH, RS26L+	2
	9040016	PAD DRIVER, 16 INCH, RS32L+	2

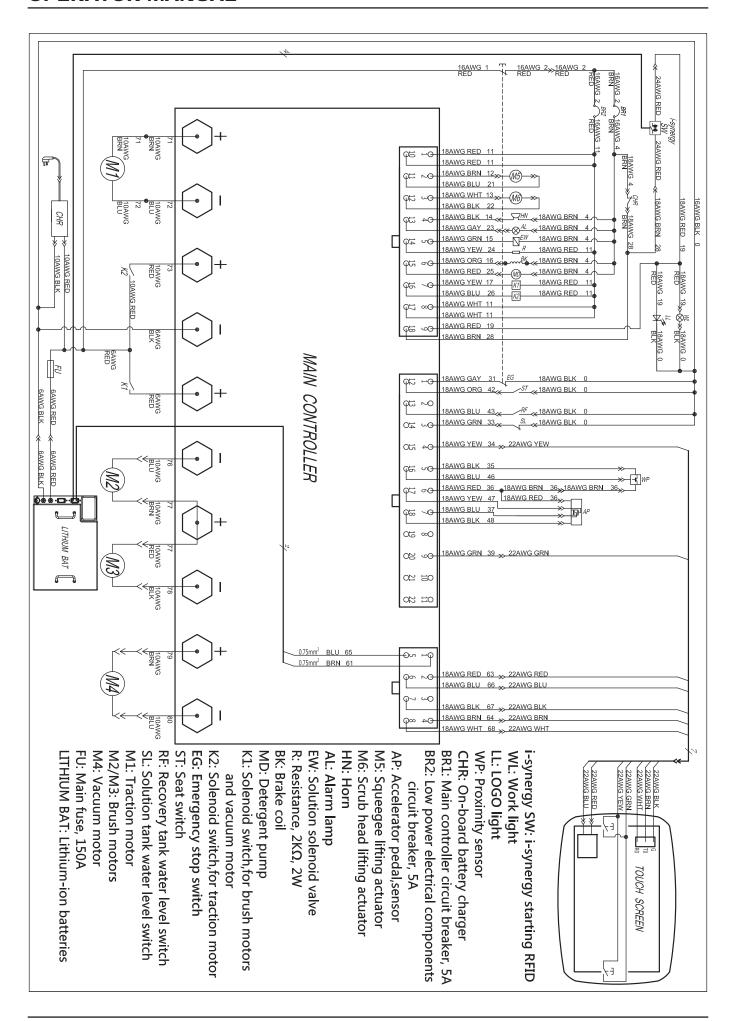

43