



# iE410

## Carpet Extractor

The iE410 self-contained carpet extractor is the perfect combination of our industry experience and knowledge. It simultaneously balances 100 psi of solution pressure, chevron-brush agitation, and powerful vacuuming for deep carpet cleaning. This compact extractor is built to last with a stainless-steel vacuum shoe and stainless quick-disconnect spray jets and a 5-year motor warranty. Its 3-stage tangential vacuum motor leaves carpet clean and virtually dry. With 10" stair-climbing wheels, the iE410 maneuvers and transports well.


# iE410

## Benefits

- Efficient, self-contained, one-pass carpet cleaning
- Stainless steel vacuum shoe and twist-lock spray jets for heavy daily use
- Easy-to use fingertip controls
- Compact design and 10" stair climbing wheels for increased maneuverability
- 3-stage tangential vacuum motor for optimal water recovery
- Large chevron pattern brush for best soil removal
- Well-balanced tanks for safe and comfortable operation
- Large recovery tank window to monitor water level easily



## Touchscreen Interface

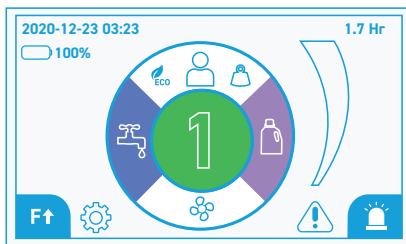

- |                     |                       |
|---------------------|-----------------------|
| Modes               | Current Mode          |
| 1.7 Hr Timer        | Detergent             |
| Fault Indicator     | Pressure              |
| F↑ Forward/Reverse  | Lights On/Off         |
| Setting             | Solution Flow Control |
| Vacuum Motor Switch |                       |

## Technical Specifications

|                             |                     |                      |
|-----------------------------|---------------------|----------------------|
| Model Type                  | USA                 | iE410                |
| Voltage                     | VOLT                | 120                  |
| Cleaning Path               | INCH                | 16                   |
| Traction Drive System       | TRACTION            | FORWARD/BACKWARD     |
| Number of Brushes           | PCS                 | 2                    |
| Brush Rotation Speed        | RPM                 | 1,000                |
| Brush Motor                 | V/WATT              | 149                  |
| Brush Pressure              | LB                  | 55                   |
| Brush Size, Chevron         | INCH                | 14                   |
| Solution Tank               | GALLON              | 10                   |
| Recovery Tank               | GALLON              | 8                    |
| Solution Pump               | PSI                 | 100                  |
| Spray Jets (3)              | STANDARD            | STAINLESS STEEL      |
| Sound Level                 | DBA                 | 77                   |
| Weight                      | LB                  | 94                   |
| Vacuum Motor                | IN                  | 5.7, 3-STAGE         |
| Vacuum Type                 | TYPE                | TANGENTIAL DISCHARGE |
| Airflow at Orifice          | CFM                 | 95                   |
| Waterlift at Sealed Orifice | IN                  | 120                  |
| Cleaning Productivity       | FT <sup>2</sup> /HR | 2,000                |
| Sizes                       | LXWXH INCH          | 35x16x36             |
| Gradeability                | %                   | 2                    |