



## RS26L+



### Ride On Auto Scrubber

The RS26L+ is 26" rider scrubber designed for large floor surface areas, is fully automated with a one button programmable switch for training-free operation, and a three-setting pad pressure of up to 165 lbs. for maximum cleaning efficiency.

Our state-of-the-art fleet management software, i-Synergy, gives you real time-access to valuable data including location, operating times, charging times, and confirmed clean—all through user-friendly reports that can be downloaded and emailed to others.


The RS26L+ is powered by a **lithium-ion battery that is guaranteed for the life of the machine.** Up to 4 hours of uninterrupted run time, is easy to maneuver, and designed with easy to read icons on the control panel—making it a great addition across all industries including healthcare, education, and industrial.

# RS26L+

## Benefits

- Reduce machine downtime with active maintenance from our dedicated team of technicians
- Monitor your machine locations and performance through i-Synergy Fleet Management
- Increase efficiency and performance through easy to read cleaning reports
- Confirm clean with interested stakeholders through downloadable cleaning reports
- Improve cleanliness with our oversized 29 gallon solutions tank
- Ensure staff and building occupant safety with our lithium-ion batteries
- Save time and money training staff with all-inclusive training and user friendly equipment
- **Lithium-Ion battery is guaranteed for the life of the machine.**

## Touchscreen Interface

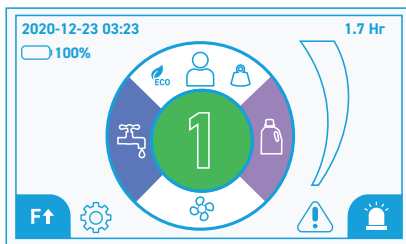

- |                     |                       |
|---------------------|-----------------------|
| Modes               | Current Mode          |
| Timer               | Detergent             |
| Fault Indicator     | Pressure              |
| Forward/Reverse     | Lights On/Off         |
| Setting             | Solution Flow Control |
| Vacuum Motor Switch |                       |



## Technical Specifications

Model Type	USA	RS26L+ I-SYNERGY
Voltage	VOLT	24
Cleaning Path	INCH	26
Traction Drive System	TRACTION	FORWARD/BACKWARD
Number of Brushes	PCS	2
Brush Rotation Speed	RPM	210
Brush Motor	V/WATT	24/2x450
Brush Pressure	LB	76-122-165
Squeegee	INCH	41.2
Solution Tank	GALLON	29
Recovery Tank	GALLON	29
Batteries	V/AH	24/225
Type Batteries	STANDARD	LI-ION
Sound Level	DBA	68
Weight without batteries	LB	703
Weight with batteries	LB	704
Run Time per charge	HOURL	3.5 - 4
Cleaning Productivity	FT <sup>2</sup> /HR	50,697
Sizes	LXWXH INCH	62x34, 5x55.5
Gradeability	%	17