



## RS32L+

**i-SYNERGY**  
Cleaning Management in Motion

### Rider Auto Scrubber

The RS32L+ is 32" rider scrubber designed for large floor surface areas, is fully automated with a one button programmable switch for training-free operation, and a three-setting pad pressure of up to 165 lbs. for maximum cleaning efficiency.

Our state-of-the-art fleet management software, i-Synergy, gives you real time-access to valuable data including location, operating times, charging times, and confirmed clean—all through user-friendly reports that can be downloaded and emailed to others.


The RS32L+ is powered by a lithium-ion battery that is guaranteed for the life of the machine. Up to 4 hours of uninterrupted run time, is easy to maneuver, and designed with easy to read icons on the control panel—making it a great addition across all industries including healthcare, education, and industrial.

# RS32L+

## Benefits

- Reduce machine downtime with active maintenance from our dedicated team of technicians
- Monitor your machine locations and performance through i-Synergy Fleet Management
- Increase efficiency and performance through easy to read cleaning reports
- Confirm clean with interested stakeholders through downloadable cleaning reports
- Improve cleanliness with our oversized 29 gallon solutions tank
- Ensure staff and building occupant safety with our lithium-ion batteries
- Save time and money training staff with all-inclusive training and user friendly equipment
- **Lithium-Ion battery is guaranteed for the life of the machine.**

## Touchscreen Interface

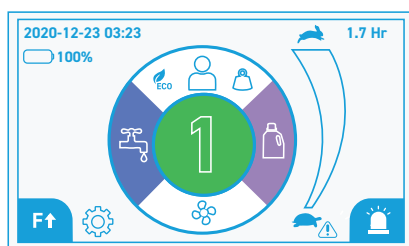

- Modes
- 1.7 Hr Timer
- Fault Indicator
- F↑ Forward/Reverse
- Setting
- Vacuum Motor Switch
- ① Current Mode
- Detergent
- Pressure
- Lights On/Off
- Solution Flow Control

## Technical Specifications

Model Type	USA	RS32L+
Voltage	VOLT	24
Cleaning Path	INCH	32
Traction Drive System	TRACTION	FORWARD/BACKWARD
Number of Brushes	PCS	2
Brush Rotation Speed	RPM	210
Brush Motor	V/WATT	24/2x450
Brush Pressure	LB	76-125-165
Squeegee	INCH	40
Solution Tank	GALLON	29
Solutions Flow Rate	GPM	0.26-0.53
Recovery Tank	GALLON	29
Batteries	V/AH	24/225
Type Batteries	STANDARD	LI-ION
Sound Level	DBA	68
Weight without batteries	LB	881
Weight with batteries	LB	903
Run Time per charge	HOURL	3 - 3.5
Cleaning Productivity	FT <sup>2</sup> /HR	50,697
Sizes	LXWXH INCH	61x40x57
Gradeability	%	7

